
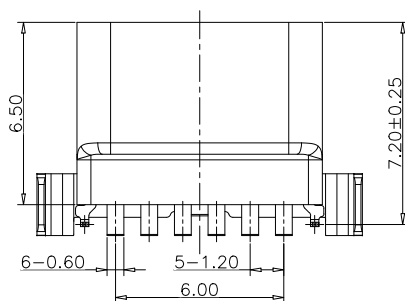
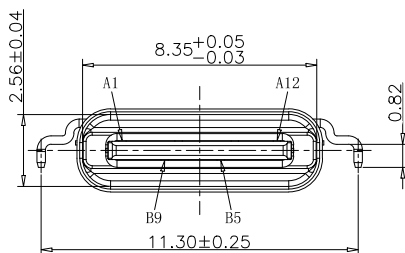
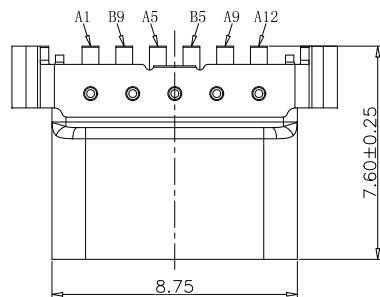
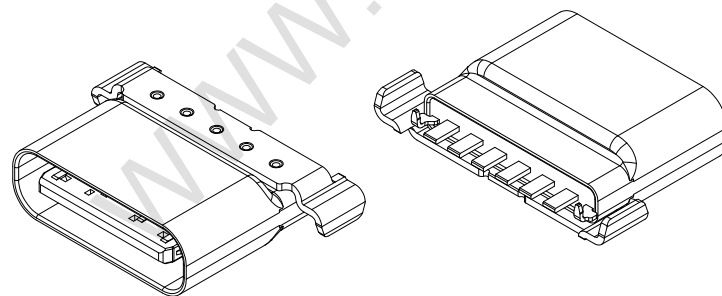
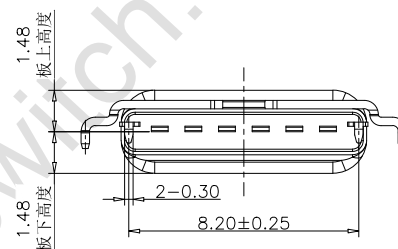


RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05

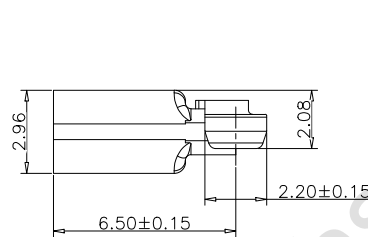

备注 (NOTE):

1. 电气特性:
 - 1.1. 接触区: 接触电阻 $40m\Omega$ Max, 允许 $10m\Omega$ 变化量. 测试条件: $20mv$, $100mA$ 下测量.
 - 1.2. 接触电流: $3A$ 最大 VBUS/GND 引脚; 其他引脚为 $0.25A$.
 - 1.3. 额定电压: $30V$.
 - 1.4. 耐电电压: $100VR.M.S.$
 - 1.5. 绝缘电阻: 至少 100 兆欧 .
2. 机械性能:
 - 3.1. 插入力: $0.51-2.04Kg$
 - 3.2. 拔出力: $0.82-2.04Kg$
 - 3.3. 耐久性: $0.61-2.04Kg$
 - 3.4. 插拔次数: 10000 次.
4. 工作环境: $-20^{\circ}C$ to $+85^{\circ}C$.

USB TYPE C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND		
		B9	VBUS
A5	CC1		
		B5	CC2
A9	VBUS		
A12	GND		

TABLE 1		Material	
NO.	PART	QTY	
1	SHELL	1	STAINLESS STEEL, Ni PLATED $30u''$ Min
2	SHELL-2	1	STAINLESS STEEL, Ni PLATED $30u''$ Min
3	CONTACT	6	COPPER STEEL, Ni $50u''$ Min; Au u''
4	MD PLATE	1	STAINLESS STEEL, NO PLATING
5	MD HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0

DESIGN	MISS ZENG	SC ALL			TOLERANCE	ANGLES
DRAWIGN	MISS LI	ANIT	mm			
CHECK	Mr. ZENG	SIZE	A4 : 210*297			
APPROVAL		VERSION	01			

品名: TYPE-C连接器
型号: TYPE-C 6P 母座防水拉伸壳
两脚护套 L=7.6



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.