






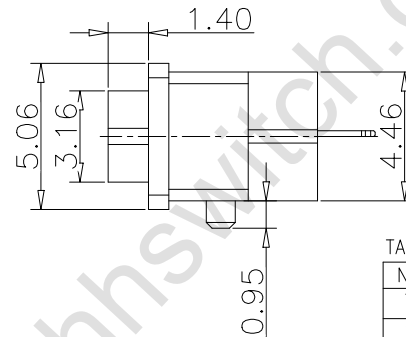


TABLE:

NO	PART	Q'TY	Material
1	SHELL	1	STAINLESS STEEL, Ni PLATED 30u"Min
2	CONTACT	4	COPPER STEEL, Ni 50u"Min; Au u"
3	MID PLATE	1	STAINLESS STEEL, NO PLATING
4	MD HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0
5	PLASTIC SHELL	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0

PIN ASSIGNMENT:

PIN NO	A1&A12	A9&B9
SIGNAL NAME	GND	VBUS

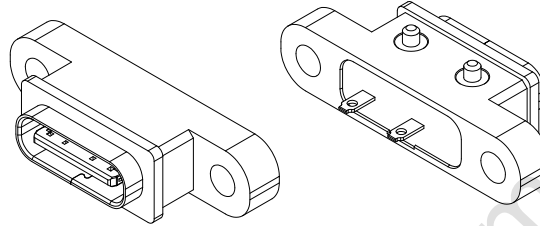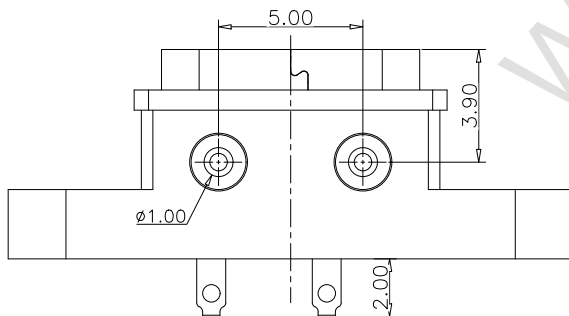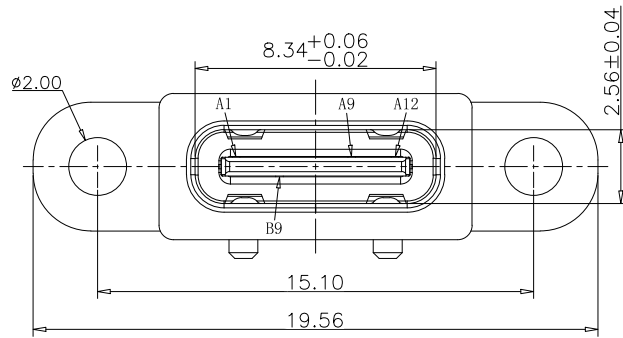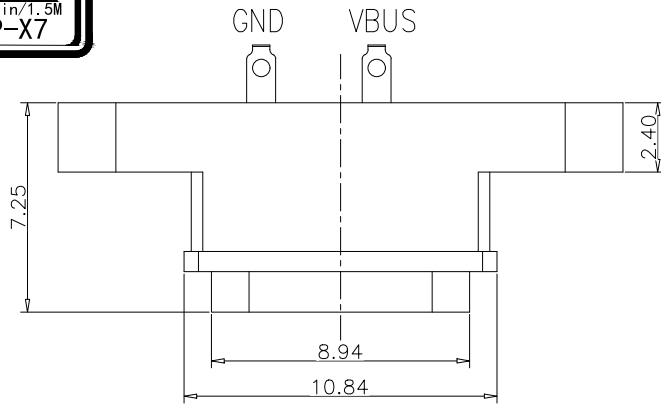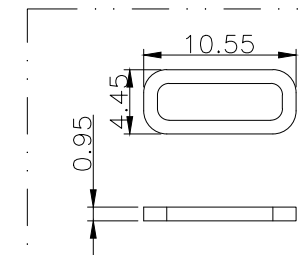

防水圈图示

DESIGN	MISS ZENG	SC ALL			TOLERANCE	ANGLES
DRAWIGN	MISS LI	ANIT	mm			
CHECK	Mr. ZENG	SIZE	A4 : 210*297			
APPROVAL		VERSION	01			

品名: TYPE-C连接器
型号: TYPE-C 2P焊线式防水母座
L=7.25



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.

备注 (NOTE):

1. 电气特性:

1.1. 接触区: 接触电阻40mΩ Max, 允许10mΩ变化量. 测试条件: 20mv, 100mA下测量.

1.2. 接触电流: 3A最大.

1.3. 额定电压: 30V.

1.4. 耐电电压: 100VR. M. S.

1.5. 绝缘电阻: 至少100兆欧.

2. 机械性能:

3.1. 插入力: 0.51-2.04Kg

3.2. 拔出力: 0.82-2.04Kg

3.3. 耐久性: 0.61-2.04Kg

3.4. 插拔次数: 10000次.

4. 工作环境: -20℃ to +85℃.