

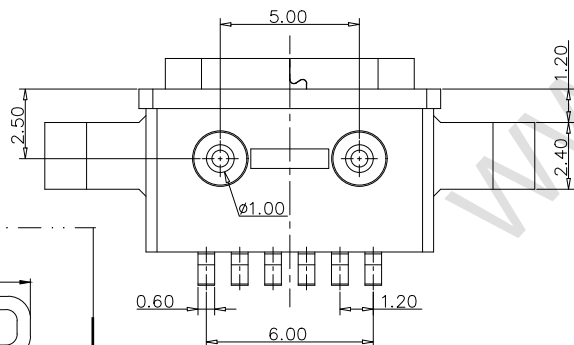
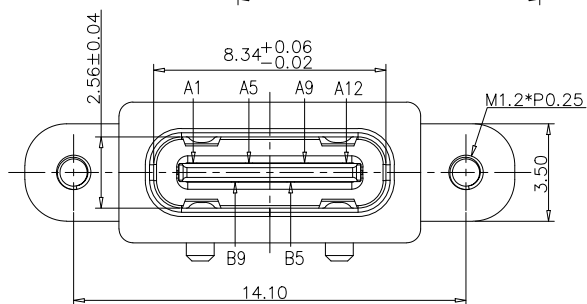
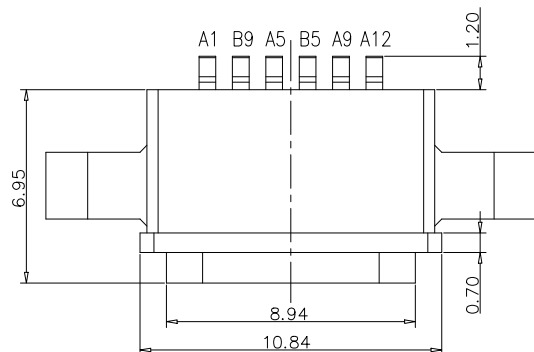


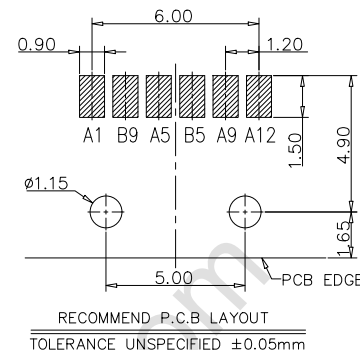

防水圈图示



备注 (NOTE):

- 电气特性:
  1. 接触区: 接触电阻40mΩ Max, 允许10mΩ变化量. 测试条件: 20mv, 100mA下测量.
  2. 接触电流: 3A最大.
  3. 额定电压: 30V.
  4. 耐受电压: 100VR. M. S.
  5. 绝缘电阻: 至少100兆欧.
- 机械性能:
  3. 1. 插入力: 0.51-2.04Kg
  3. 2. 拔出力: 0.82-2.04Kg
  3. 3. 耐久性: 0.61-2.04Kg
  3. 4. 插拔次数: 10000次.
  4. 工作环境: -20℃ to +85℃.

USB TYPE C PIN ASSIGNMENTS

| PIN NUMBER | SIGNAL NAME | PIN NUMBER | SIGNAL NAME |
|------------|-------------|------------|-------------|
| A1         | GND         | B9         | VBUS        |
| A5         | CC1         | B5         | CC2         |
| A9         | VBUS        |            |             |
| A12        | GND         |            |             |

TABLE:

| NO | PART       | QTY | Material                                          |
|----|------------|-----|---------------------------------------------------|
| 1  | SHELL      | 1   | STAINLESS STEEL, Ni PLATED 30u"Min                |
| 2  | CONTACT    | 6   | COPPER STEEL, Ni 50u"Min; Au u"                   |
| 3  | MID PLATE  | 1   | STAINLESS STEEL, NO PLATING                       |
| 4  | MD HOUSING | 1   | HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0 |

|          |           |         |              |  |           |        |                                   |
|----------|-----------|---------|--------------|--|-----------|--------|-----------------------------------|
| DESIGN   | MISS ZENG | SC ALL  |              |  | TOLERANCE | ANGLES | 品名:                               |
| DRAWIGN  | MISS LI   | ANIT    | mm           |  |           |        | TYPE-C连接器                         |
| CHECK    | Mr. ZENG  | SIZE    | A4 : 210*297 |  |           |        | 型号:                               |
| APPROVAL |           | VERSION | 01           |  |           |        | TYPE-C 6P板上防水母座<br>带M1.2螺母 L=6.95 |



东莞市航宏电子科技有限公司  
Dongguan Hanghong Electronics Co., Ltd.