


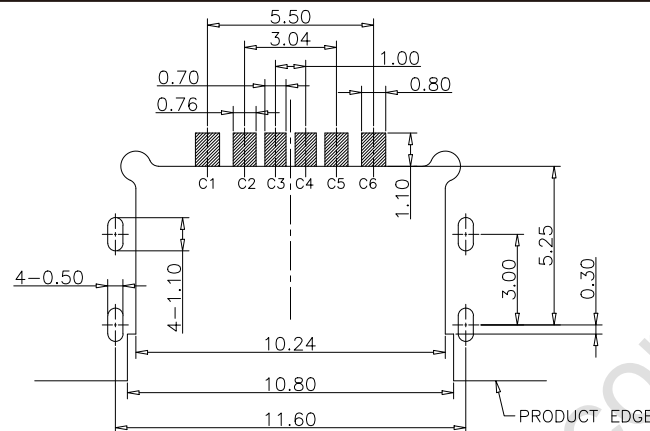
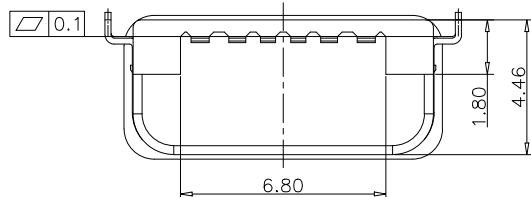
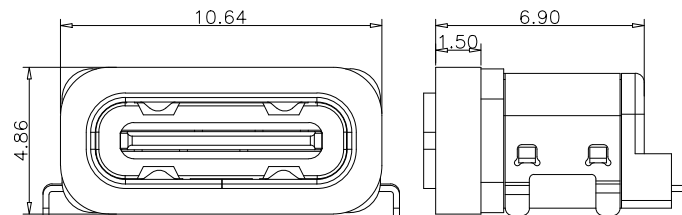


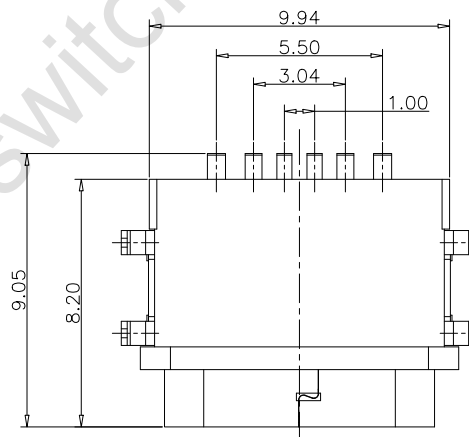


RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05

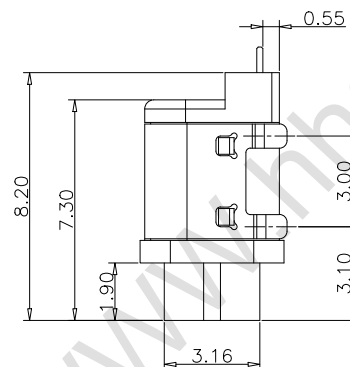

加防水圈示意图

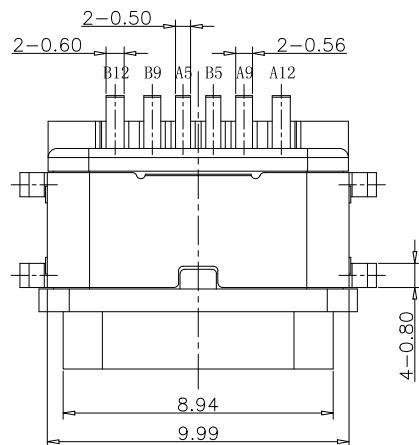

- NOTES:
SPECIFICATION:
1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: $-30^{\circ}\text{C} \sim +85^{\circ}\text{C}$
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN
6. INSERTION FORCE: 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10000 CYCLES
9. THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT $210\sim 230^{\circ}\text{C}$
10. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX6.

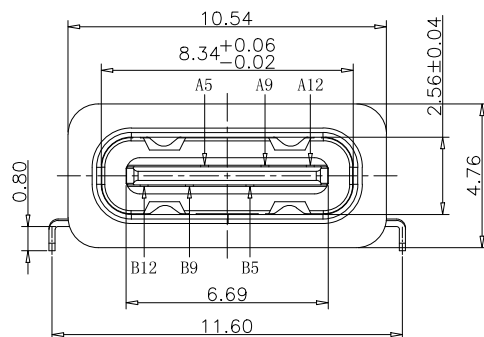


PIN ASSIGNMENT

PIN NO	A1&B12	A4&B9	A5	B5	A9&B4	A12&B1
SIGNAL NAME	GND	VBUS	CC1	CC2	VBUS	GND
PCB PAD NO.	C1	C2	C3	C4	C5	C6

DESIGN	MISS ZENG	SC ALL			TOLERANCE	ANGLES	品名:
DRAWING	MISS LI	ANIT	mm				TYPE-C连接器
CHECK	Mr. ZENG	SIZE	A4 : 210*297				型号: TYPE-C 6P 沉板防水母座A款
APPROVAL		VERSION	01				外壳4脚插板



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.

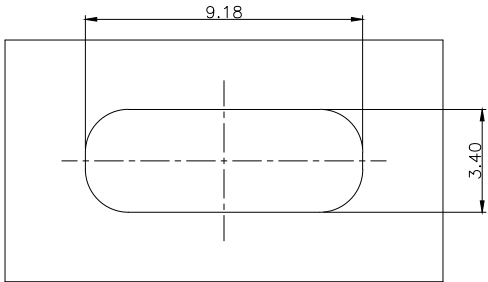

密封开孔参考尺寸(只供参考)
组装外壳时需要打环保润滑油

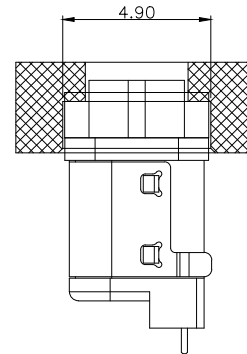
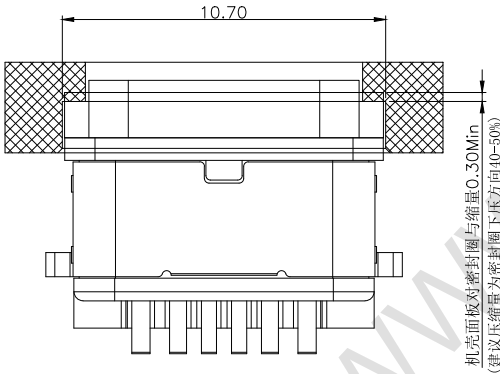


TABLE:

NO	PART	Q'TY	Material
1	SHELL	1	STAINLESS STEEL,NI PLATED
2	CONTACT	6	COPPER STEEL,TIN/Au/NI PLATED
3	MID PLATE	1	STAINLESS STEEL,NO PLATING
4	1MD HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0
5	2MD HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0
6	SHIELDING PLATE	1	STAINLESS STEEL,NI PLATED

DESIGN	MISS ZENG	SC ALL			TOLERANCE	ANGLES
DRAWIGN	MISS LI	ANIT	mm			
CHECK	Mr. ZENG	SIZE	A4 : 210*297			
APPROVAL		VERSION	01			

品名：

TYPE-C连接器

型号：

TYPE-C 6P 沉板防水母座A款
外壳4脚插板



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.