
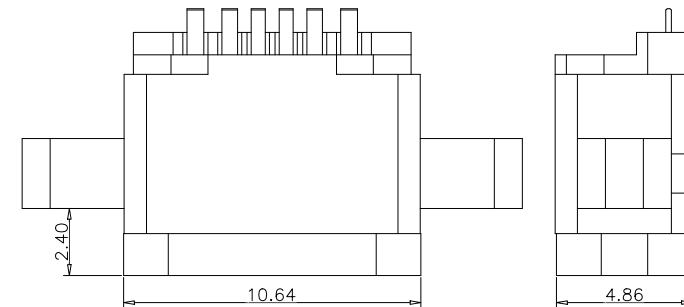
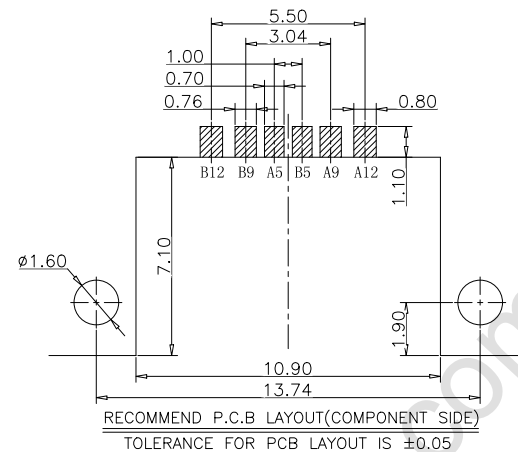
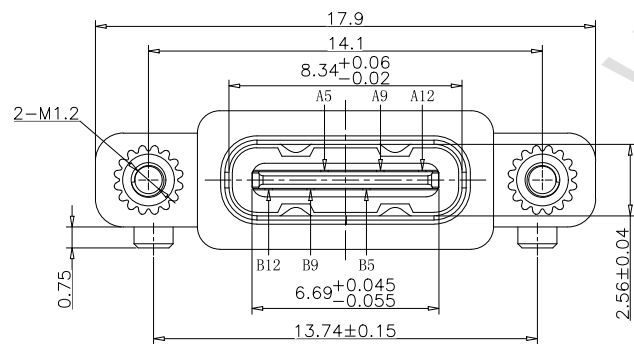
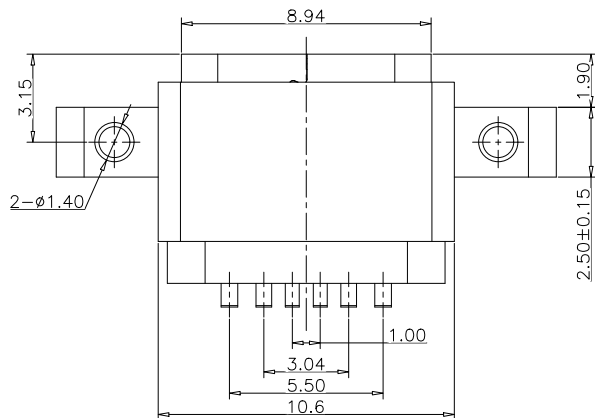


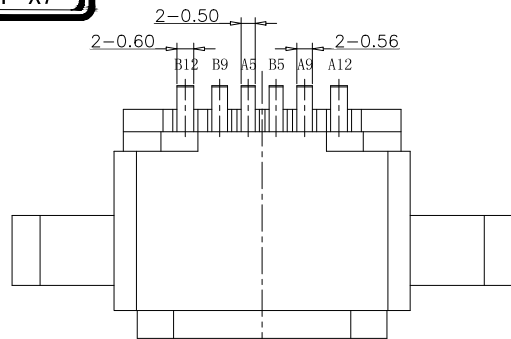

带防水圈示意图

NOTES:

SPECIFICATION:

- 1.CURRENT RATING: 3.0A MAX
- 2.VOLTAGE: 100 VAC
- 3.TEMPERATURE RANGE: -30°C~+85°C
- 4.CONTACT RESISTANCE: 40 MILLIONHM MAX
- 5.INSULATION RESISTANCE: 100 MEGOHMS MIN
- 6.INSERTION FORCE: 5N~20N
- 7.UNMATING FORCE: 8N~20N
- 8.DURABILITY: 10000 CYCLES
- 9.WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7.

TABLE:

| NO | PART        | Q'TY | Material                       |
|----|-------------|------|--------------------------------|
| 1  | SHELL       | 1    | STAINLESS STEEL, NI PLATED     |
| 2  | CONTACT     | 6    | COPPER STEEL, TIN/Au/NI PLATED |
| 3  | MID PLATE   | 1    | STAINLESS STEEL, NO PLATED     |
| 4  | 1MD HOUSING | 1    | HIGH TEMPERATURE PLASTIC BLACK |
| 5  | 2MD HOUSING | 1    | HIGH TEMPERATURE PLASTIC BLACK |

USB TYPE C PIN ASSIGNMENTS

| PIN NUMBER | SIGNAL NAME | PIN NUMBER | SIGNAL NAME |
|------------|-------------|------------|-------------|
| A5         | CC1         | B12        | GND         |
| A9         | VBUS        | B9         | VBUS        |
| A12        | GND         | B5         | CC2         |

|          |           |         |              |  |           |        |
|----------|-----------|---------|--------------|--|-----------|--------|
| DESIGN   | MISS ZENG | SC ALL  |              |  | TOLERANCE | ANGLES |
| DRAWING  | MISS LI   | ANIT    | mm           |  |           |        |
| CHECK    | Mr. ZENG  | SIZE    | A4 : 210*297 |  |           |        |
| APPROVAL |           | VERSION | 01           |  |           |        |

品名: TYPE-C连接器  
型号: TYPE-C 6P 防水母座 带螺母



东莞市航宏电子科技有限公司  
Dongguan Hanghong Electronics Co., Ltd.