


F E D C B A

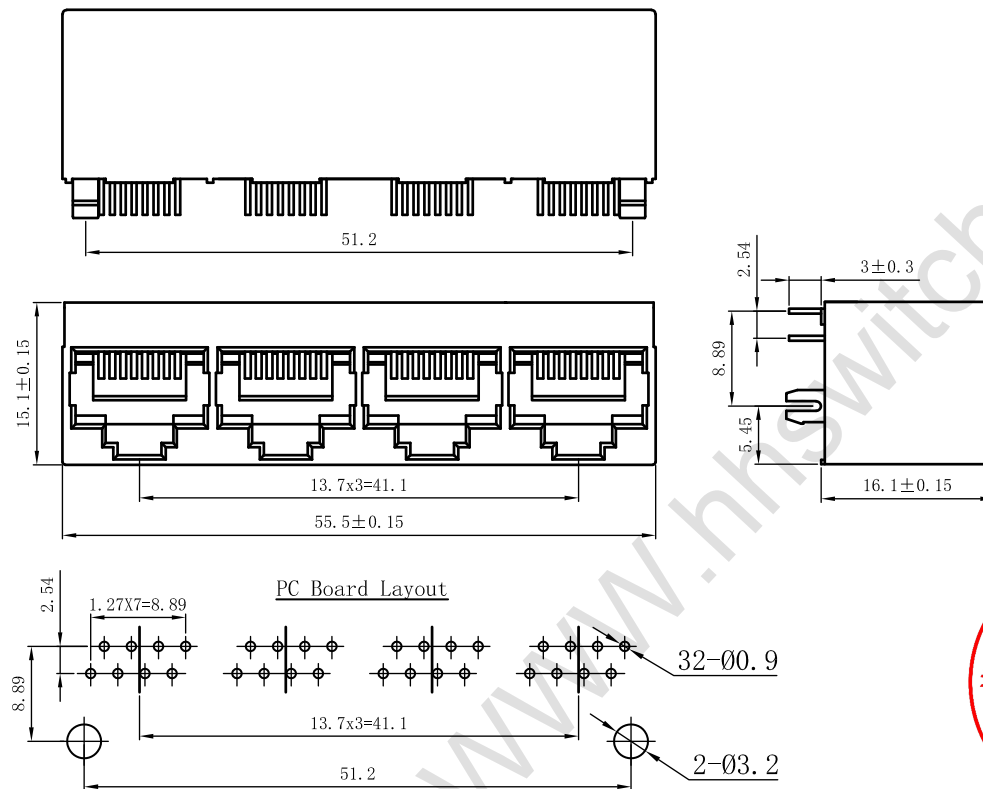

SPECIFICATIONS

ELECTRICAL

1. CURRENT RATING: 1.5AMPS@25° C
 2. VOLTAGE RATING: 125V AC
 3. INSULATION RESISTANCE: 1000M Ω MIN. @500VDC
 4. WITHSTANDING VOLTAGE: 1000V AC RMS OR1500V DC @ 0.5mA 50Hz or 60Hz 1Minute
 5. CONTACT RESISTANCE: $\geq 30m\Omega$ Max
- WORKING TEMPERATURE: -40°C ~ +85°C

MECHANICAL

1. MATING FORCE: 30N Max
2. RETENTION STRENGTH: $\geq 76N$
3. DURABILITY: ≥ 750 CYCLES MIN

MATERIAL

1. HOUSING: PA FILLED WITH FIBERGLASS
 2. INSERT MATERIAL: PA FILLED WITH FIBERGLASS
 3. CONTACT MATERIAL: PHOSPHOR BRONZE $\phi 0.46mm$
 4. CONTACT PLATING: GOLD PLATING OVER NICKEL
- F μ " INCH, 3 μ " INCH, 6 μ " INCH, 15 μ " INCH, 30 μ " INCH, 50 μ " INCH



DESIGN	MISS ZENG	SC ALL			未注公差 T00LERANCE		品名 :
DRAWIGN	MISS LI	ANIT	MM		.0 ± 0.20	ANGLES $\pm 5^\circ$	网口连接器
CHECK	Mr. ZENG	SIZE	A4 : 210*297		.00 ± 0.15		型号 :
APPROVAL		VERSION	01		.000 ± 0.1		HHRJ45-5214-8p8c



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.

F E D C B A