


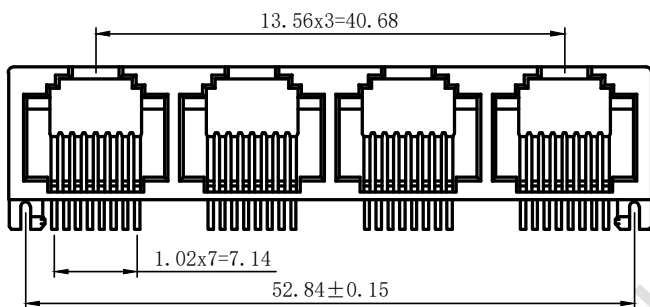


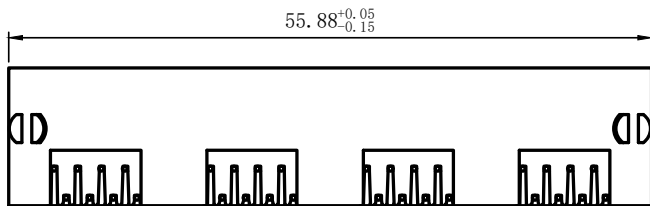

PC Board Layout

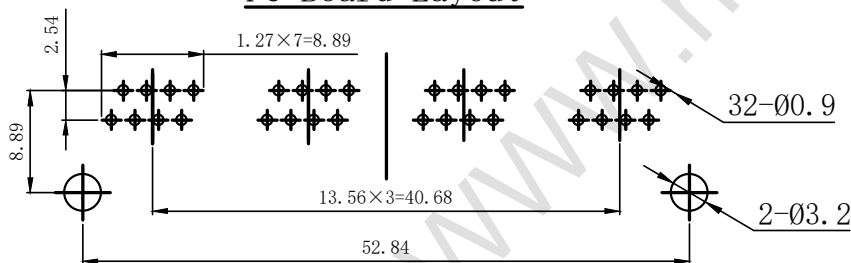

SPECIFICATIONS

ELECTRICAL

1. CURRENT RATING: 1.5AMPS@25° C
2. VOLTAGE RATING: 125V AC
3. INSULATION RESISTANCE: 1000MΩ MIN. @500VDC
4. WITHSTANDING VOLTAGE: 1000V AC RMS OR1500V DC @ 0.5mA 50Hz or 60Hz 1Minute
5. CONTACT RESISTANCE: ≥30mΩ Max

WORKING TEMPERATURE: -40℃ ~ +85℃

MECHANICAL

1. MATING FORCE: 30N Max
2. RETENTION STRENGTH: ≥76N
3. DURABILITY: ≥750 CYCLES MIN

MATERIAL

1. HOUSING: PA FILLED WITH FIBERGLASS
 2. INSERT MATERIAL: PA FILLED WITH FIBERGLASS
 3. CONTACT MATERIAL: PHOSPHOR BRONZE Ø0.46mm
 4. CONTACT PLATING: PLATING OVER NICKEL
- F μ "INCH, 3 μ "INCH, 6 μ "INCH, 15 μ "INCH, 30 μ "INCH, 50 μ "INCH

受控文件

DESIGN	MISS ZENG	SC ALL			未注公差 T00LERANCE		品名:
DRAWIGN	MISS LI	ANIT	MM		.0 ±0.20	ANGLES ±5°	网口连接器
CHECK	Mr. ZENG	SIZE	A4: 210*297		.00 ±0.15		型号:
APPROVAL		VERSION	01		.000 ±0.1		HHRJ45-5324-8p8c-1356



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.