
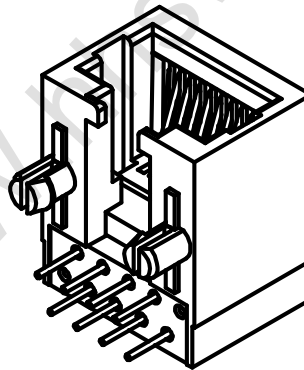
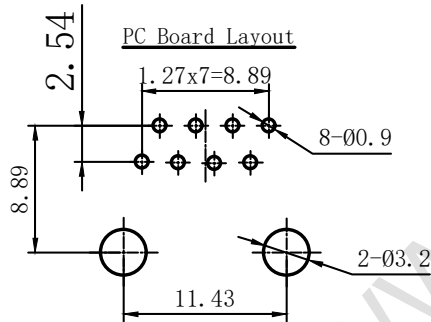
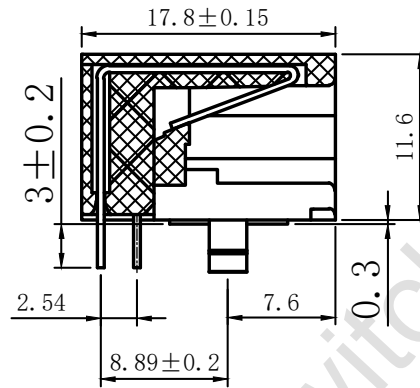


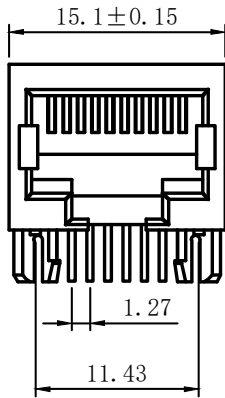

## SPECIFICATIONS

### ELECTRICAL

1. CURRENT RATING: 1.5AMPS@25° C
2. VOLTAGE RATING: 125V AC
3. INSULATION RESISTANCE: 1000MΩ MIN. @500VDC
4. WITHSTANDING VOLTAGE: 1000V AC RMS OR1500V DC @ 0.5mA 50Hz or 60Hz 1Minute
5. CONTACT RESISTANCE: ≥30mΩ Max

WORKING TEMPERATURE: -40℃ ~ +85℃

### MECHANICAL

1. MATING FORCE: 30N Max
2. RETENTION STRENGTH: ≥76N
3. DURABILITY: ≥750 CYCLES MIN

### MATERIAL

1. HOUSING: PA FILLED WITH FIBERGLASS
2. INSERT MATERIAL: PA FILLED WITH FIBERGLASS
3. CONTACT MATERIAL: PHOSPHOR BRONZE Ø0.46mm
4. CONTACT PLATING: PLATING OVER NICKEL  
F μ "INCH, 3 μ "INCH, 6 μ "INCH, 15 μ "INCH, 30 μ "INCH, 50 μ "INCH



|          |           |         |             |  |                 |            |                   |
|----------|-----------|---------|-------------|--|-----------------|------------|-------------------|
| DESIGN   | MISS ZENG | SC ALL  |             |  | 未注公差 T00LERANCE |            | 品名:               |
| DRAWIGN  | MISS LI   | ANIT    | MM          |  | .0 ±0.20        | ANGLES ±5° | 网口连接器             |
| CHECK    | Mr. ZENG  | SIZE    | A4: 210*297 |  | .00 ±0.15       |            | 型号:               |
| APPROVAL |           | VERSION | 01          |  | .000 ±0.1       |            | HHRJ45-5611-10p8c |



**东莞市航宏电子科技有限公司**  
Dongguan Hanghong Electronics Co., Ltd.