
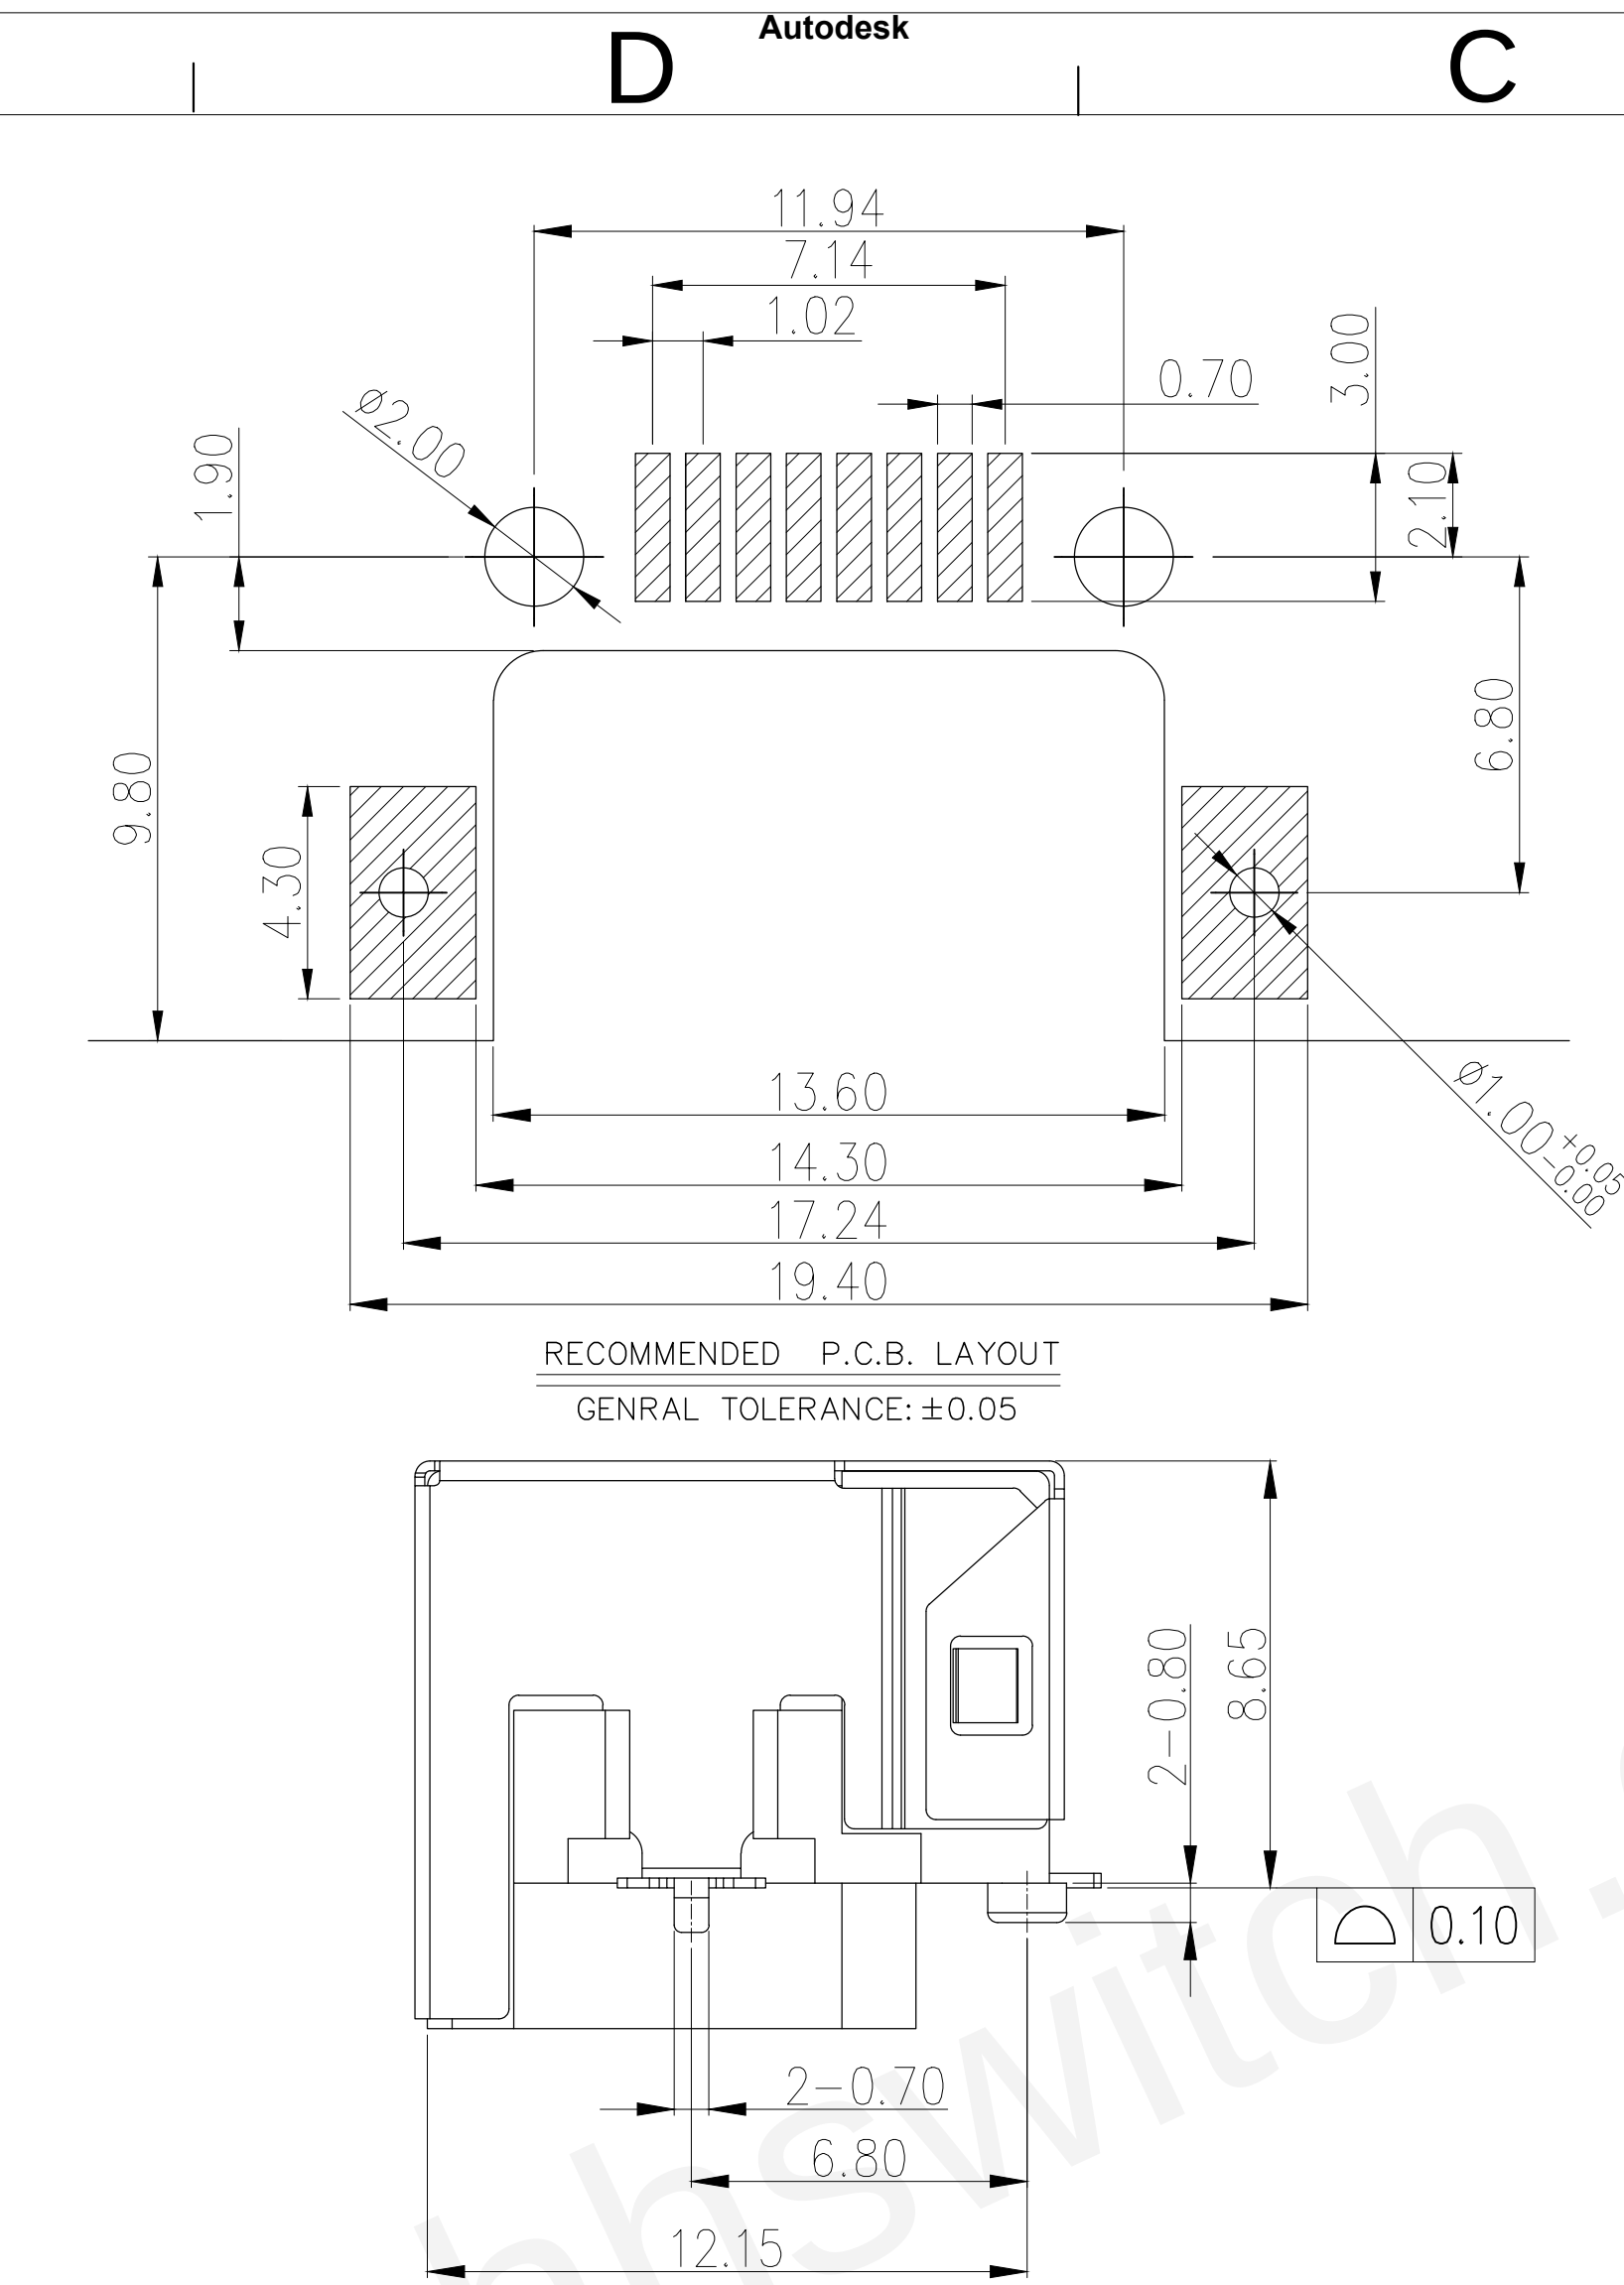


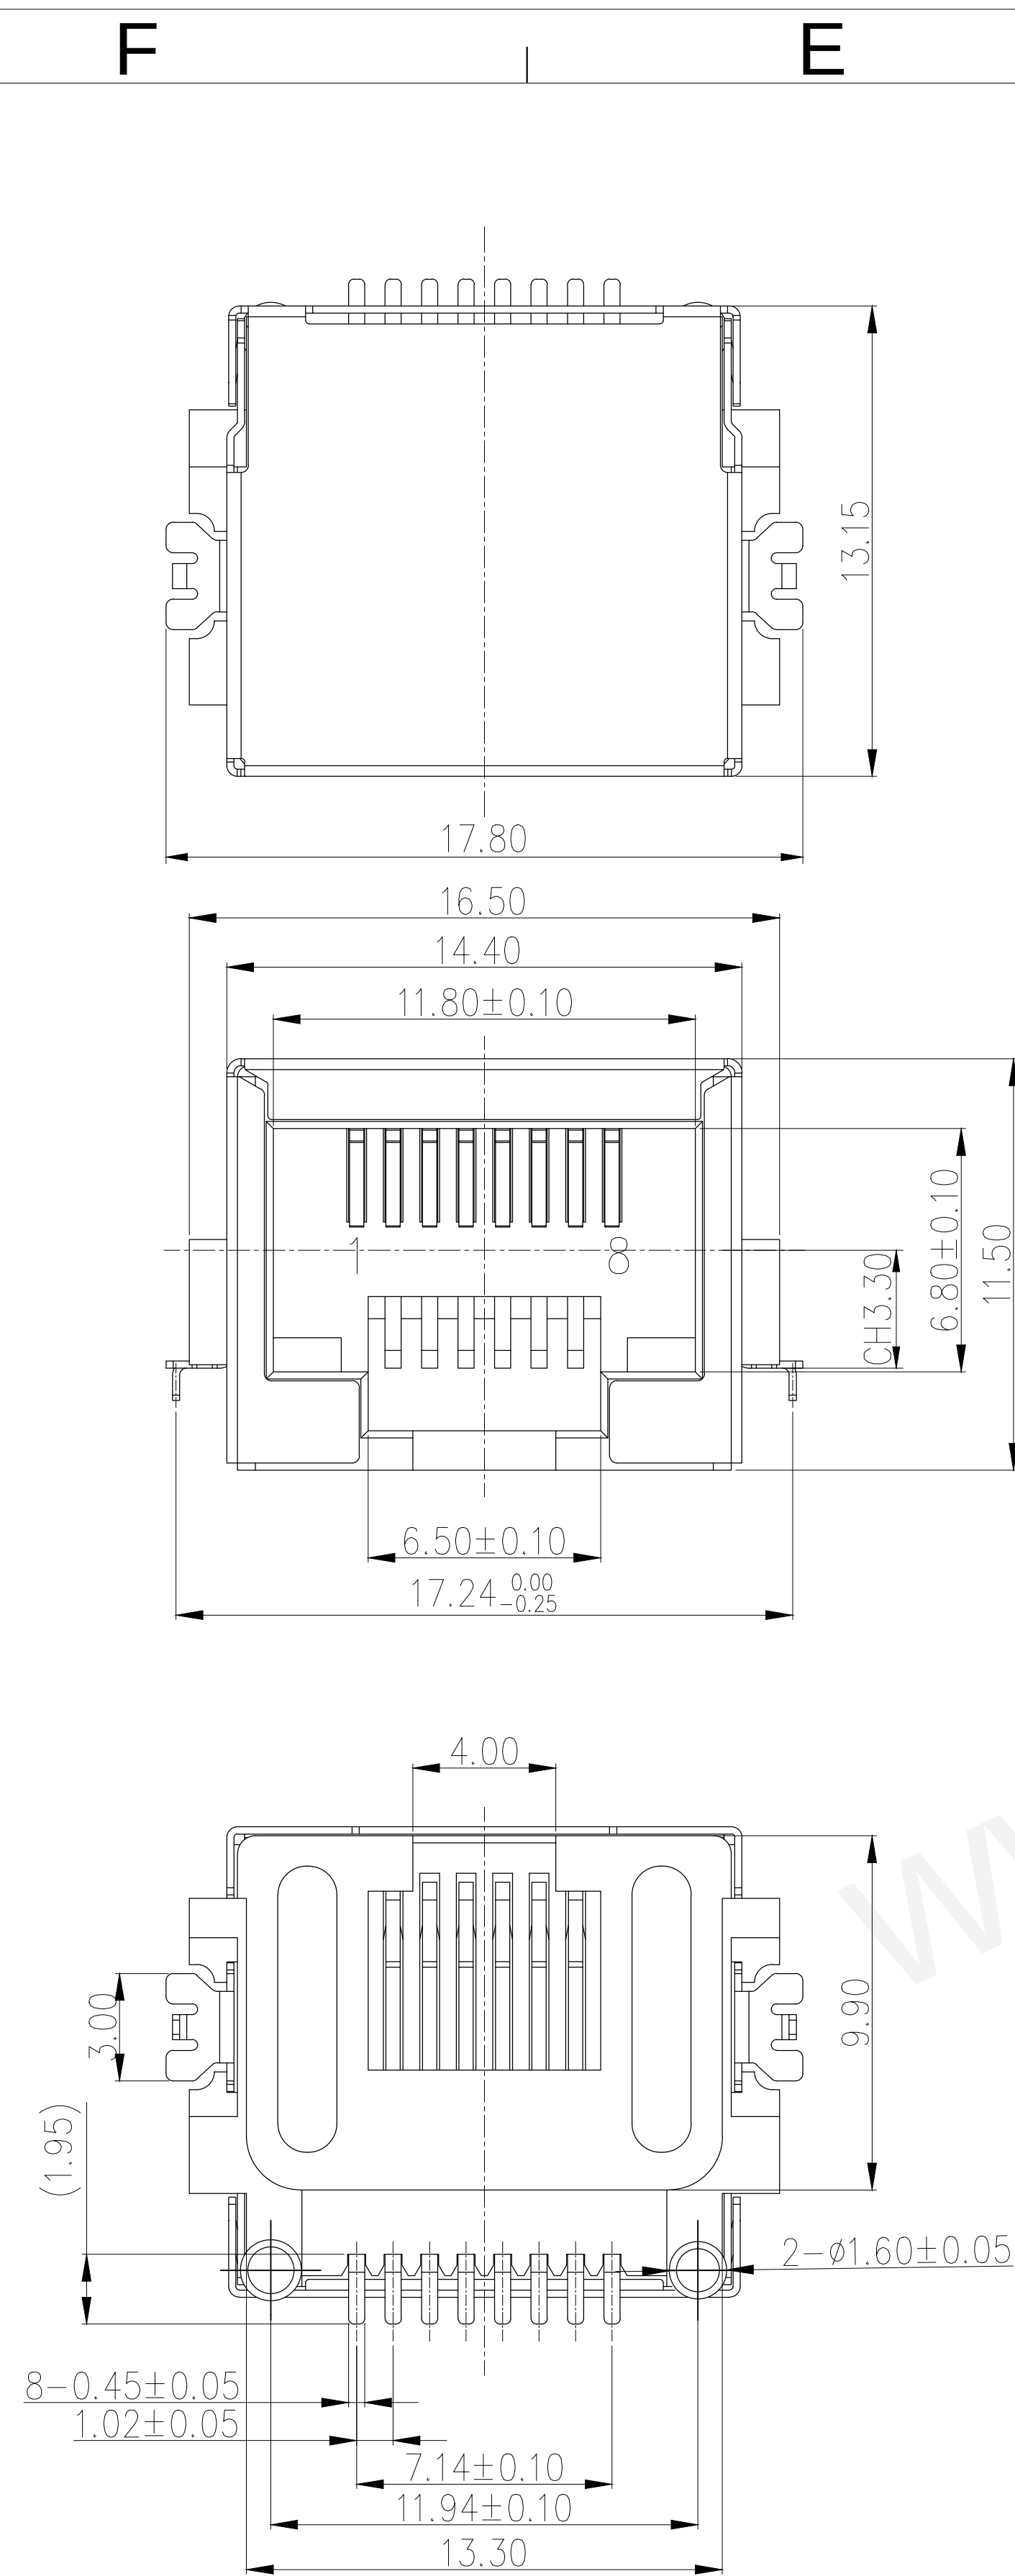

NOTE:


- 1.MATERIAL SPECIFICATION:
 - 1.1 HOUSING:HIGH TEMPERATURE RESISTANT PLASTIC,UL94 V-0.
 - 1.2 CONTACTS:COPPER ALLOY
 - 1.3 SHELL: COPPER ALLOY
- 2.PLATING SPECIFICATION:
 - 2.1 CONTACTS:
 - Ni 50u" MIN. UNDER PLATED OVER ALL.
 - GOLD FLASH PLATING ON CONTACT AREA
 - TIN PLATING ON SOLDER AREA
 - 2.2 SHELL:
 - Ni 30u" MIN. UNDER PLATED OVER ALL.
- 3.MECHANICAL PERFORMANCE,
 - 3.1 INSERTION FORCE: 25N Max.
 - 3.2 DURABILITY: 750 CYCLES.
- 4.ELECTRICAL PERFORMANCE,
 - 4.1 CURRENT RATING:1.5A
 - VOLTAGE RATING:150 V AC RMS.
 - 4.2 INSULATION RESISTANCE: 1000MΩ MIN
 - 4.3 DIELECTRIC WITHSTAND VOLTAGE,AC 1000V FOR 1 MINUTE.
5. ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -40°C~+80°C.
- 6.IR REFLOW:
 - THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.

PIN	Name	Descnption
1	TX+	Trancelive Data+(发信号+)
2	TX-	Trancelive Data-(发信号-)
3	RX+	Receive Data+(收信号+)
4	N/C	Not connected(空脚)
5	N/C	Not connected(空脚)
6	RX-	Receive Data-(收信号-)
7	N/C	Not connected(空脚)
8	N/C	Not connected(空脚)

DESIGN	MISS ZENG	SC ALL			未注公差 T00LERANCE		品名: 网口连接器
DRAWIGN	MISS LI	ANIT	MM		X. ±0.35	X.XX ±0.25	
CHECK	Mr. ZENG	SIZE	A4: 210*297		X. X ±0.15	X. °±2.00°	
APPROVAL		VERSION	01				


型号: RJ45沉板8.6全包 SMT	
------------------------	--





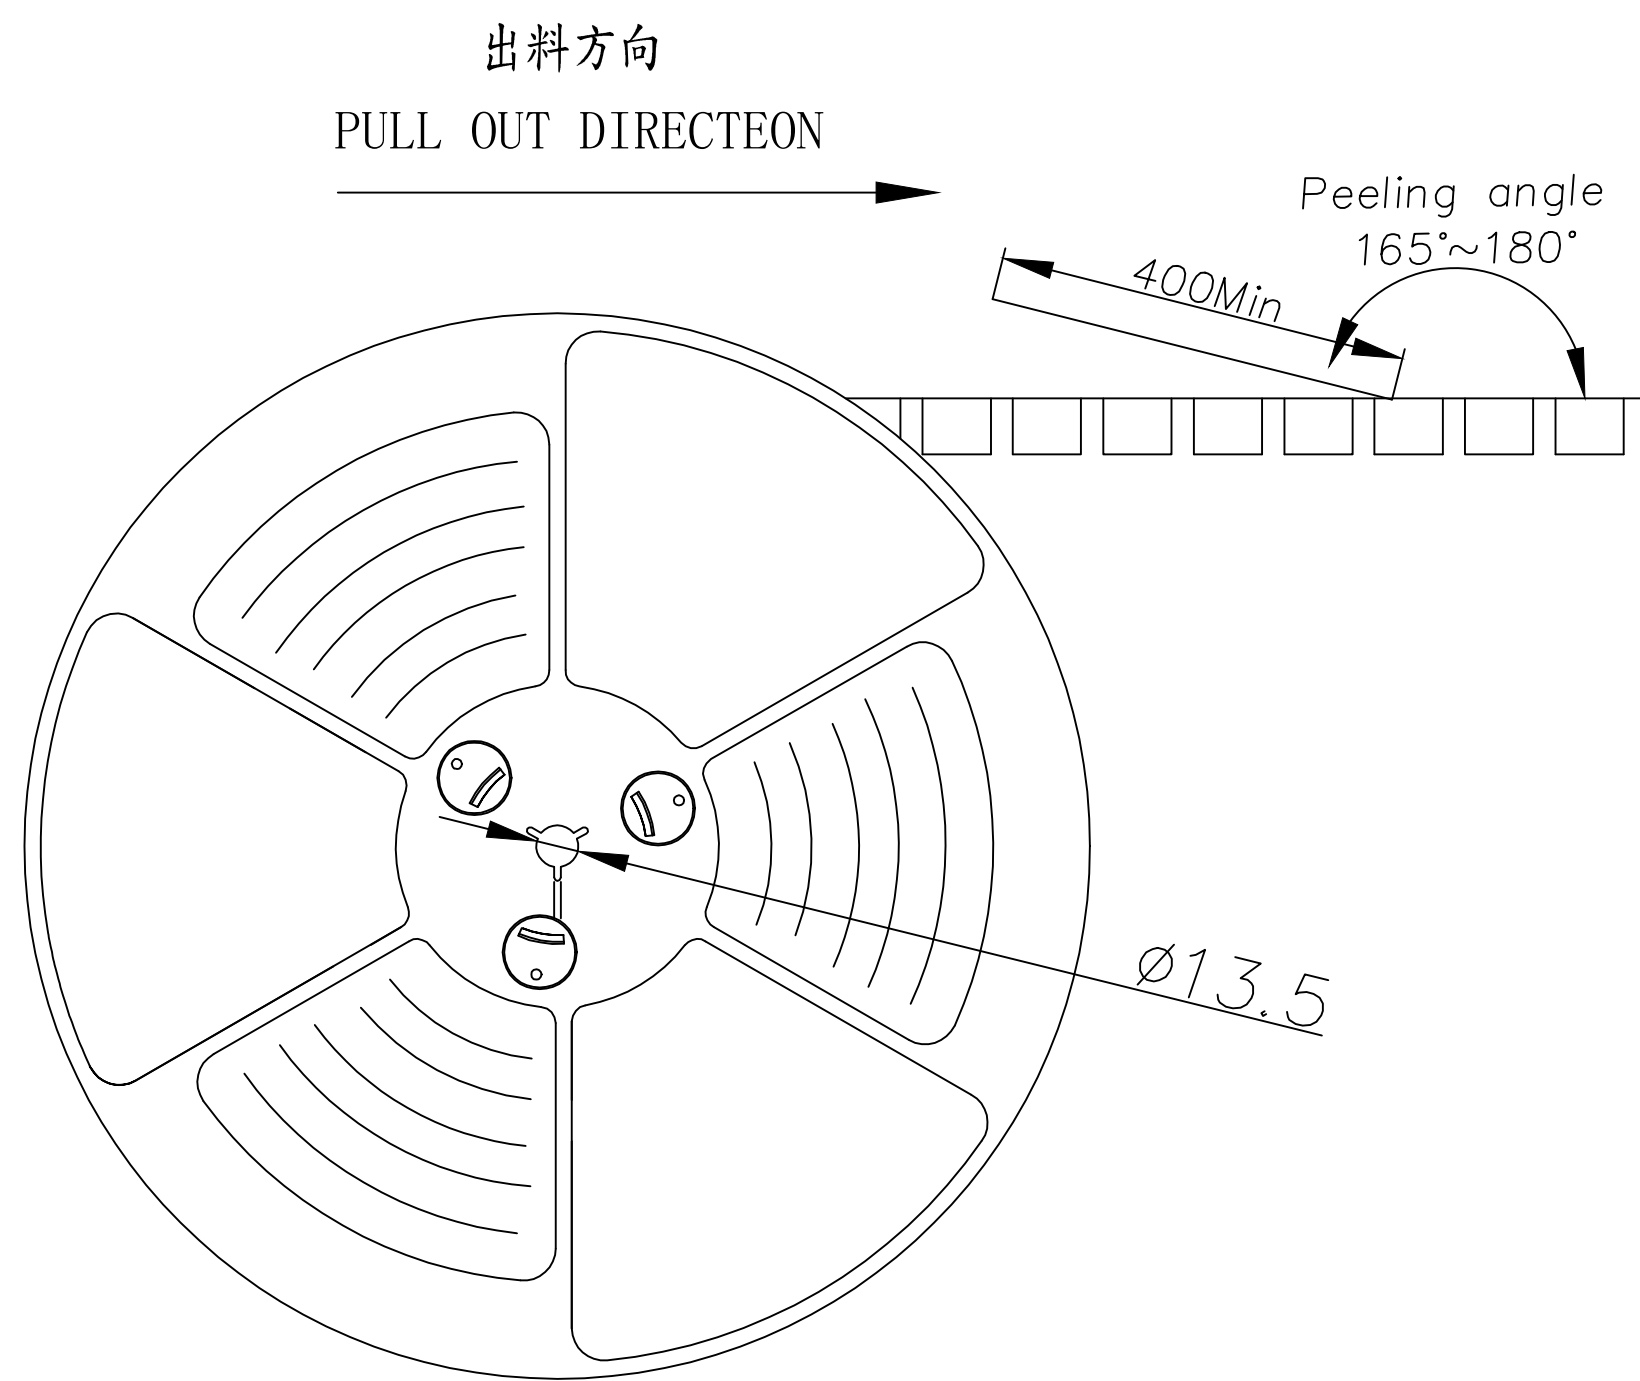


NOTES

1.帶子引導長度
LEAD TAPE LENGTH
出料方向
PULL OUT DIRECTEON

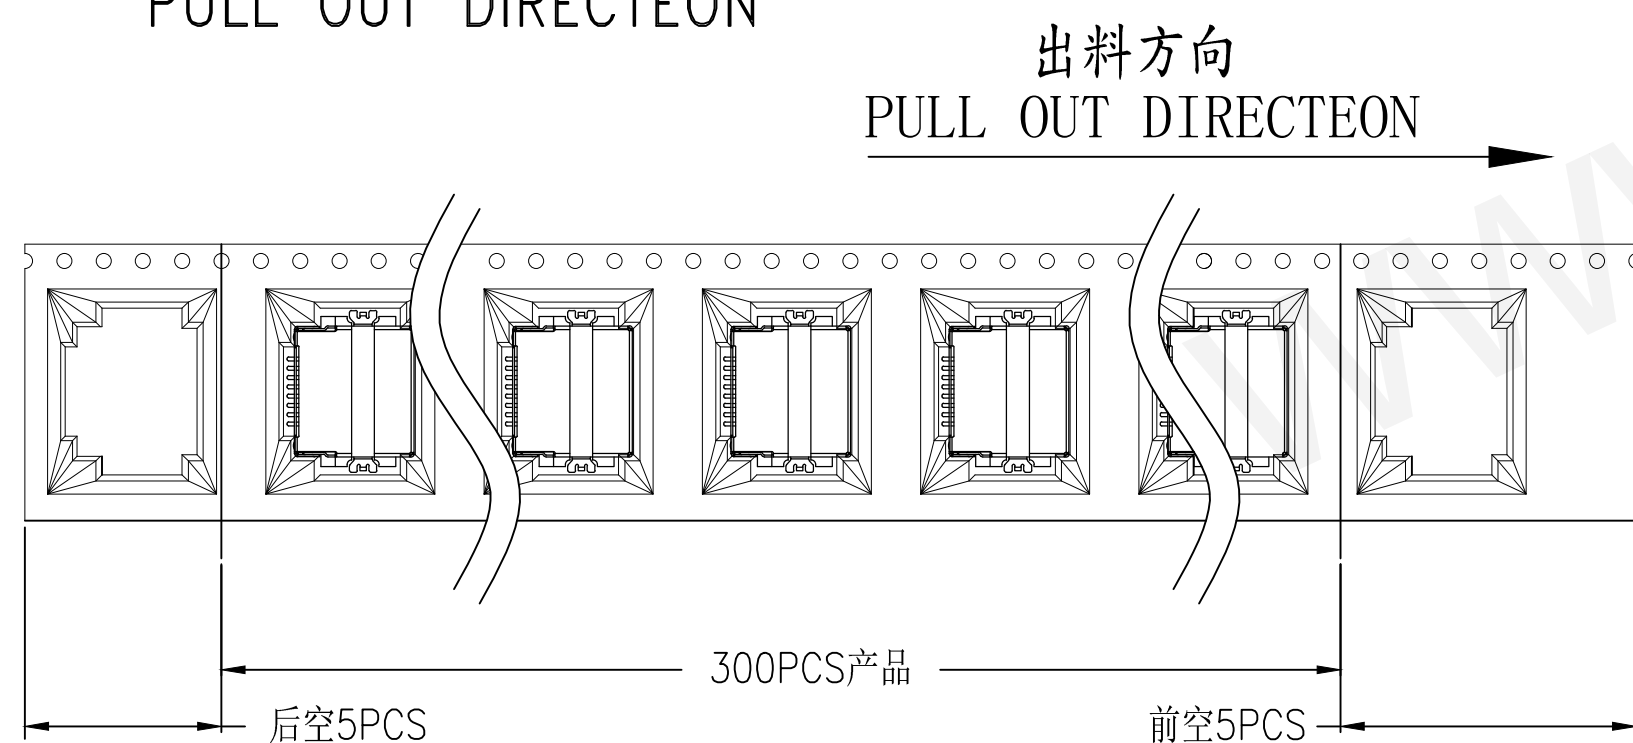

2.上帶 剝力力為：0.1~1.3N(10.2gf~130gf)
PEELING OFF FORCE OF TOP TAPE:0.1~1.3N(10.2gf~130gf)
出貨'運輸過程中一定注意：
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT：
卷帶在運輸過程中不能散開
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

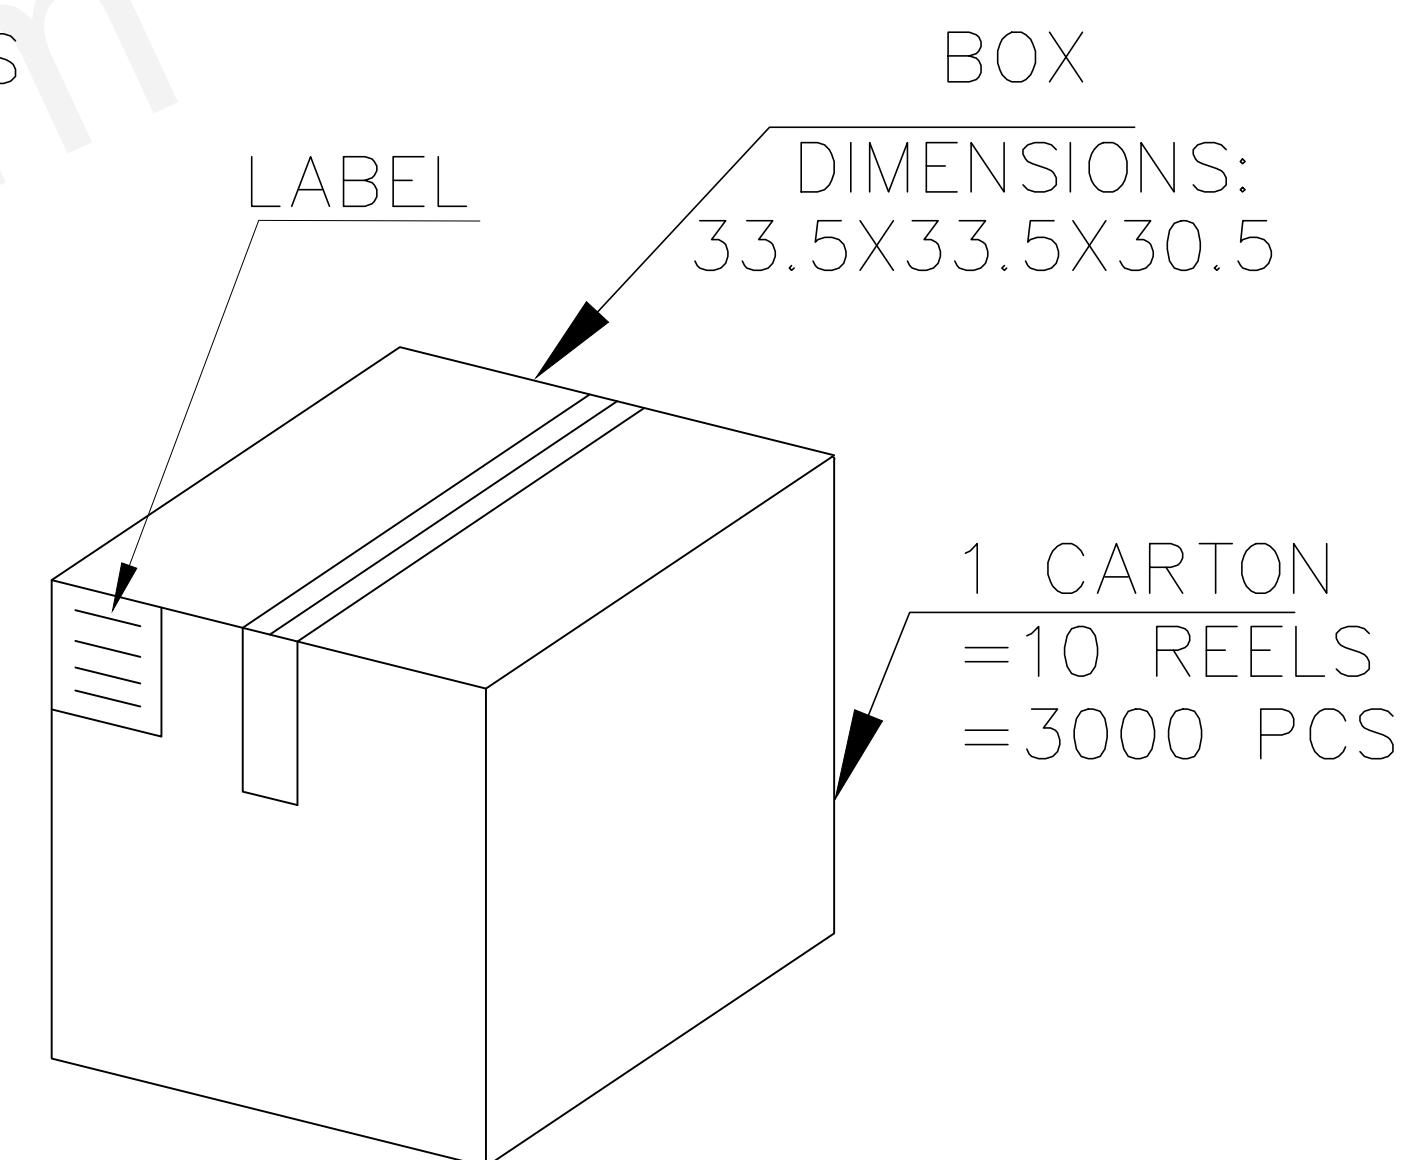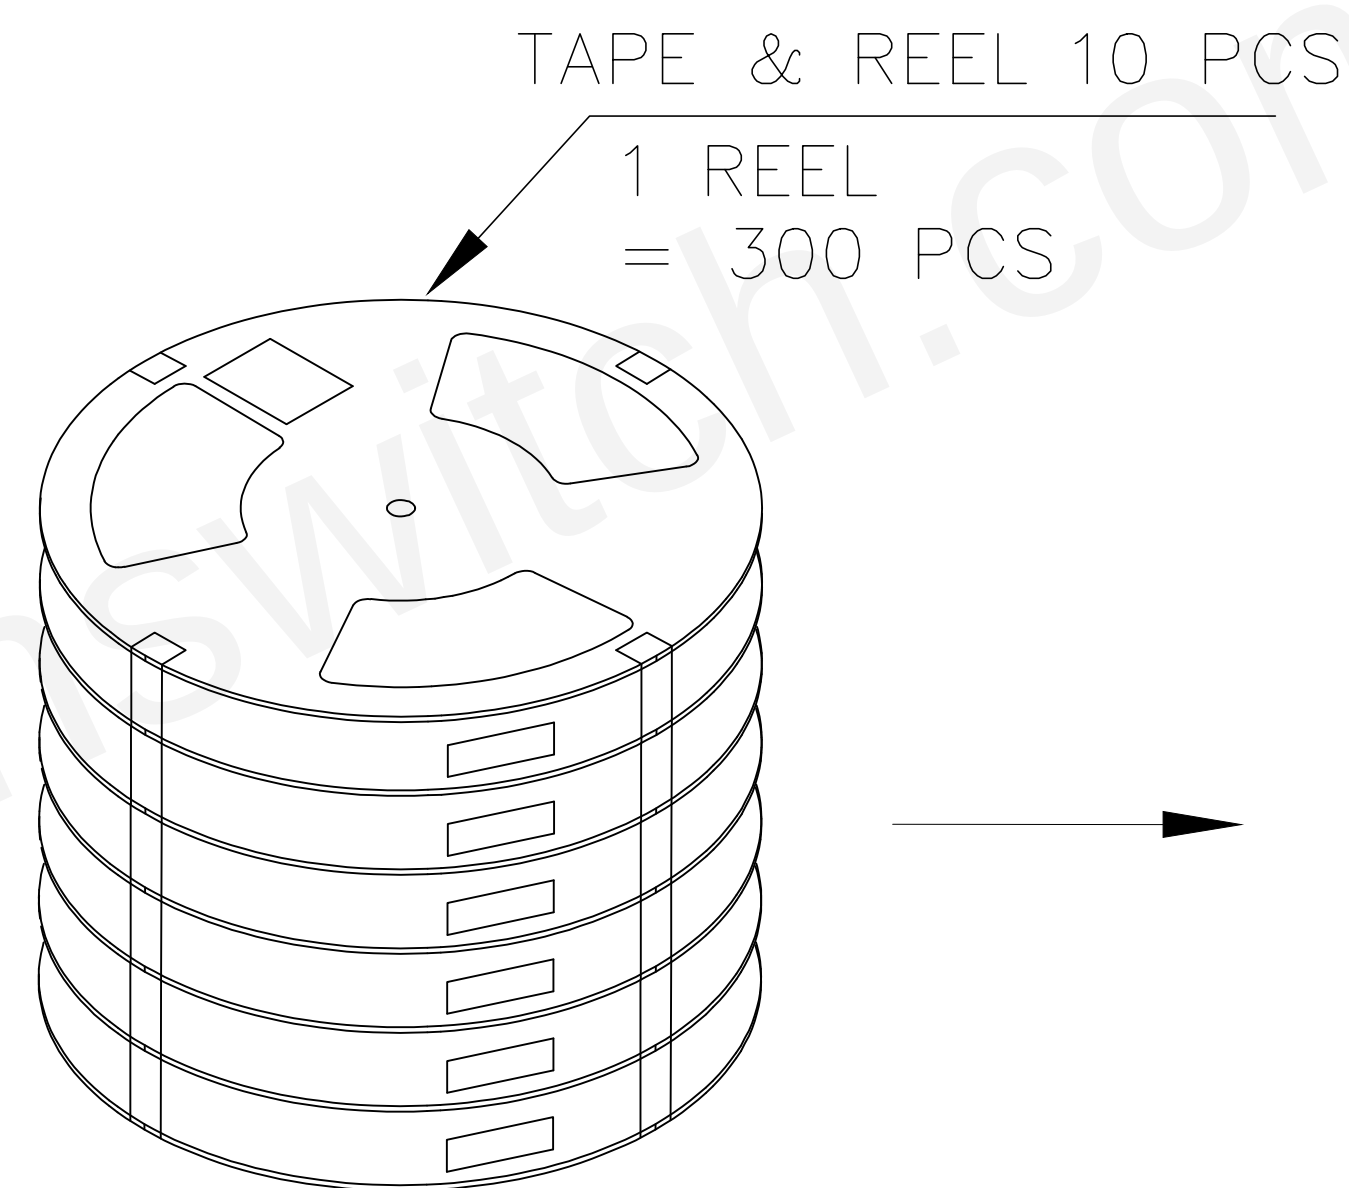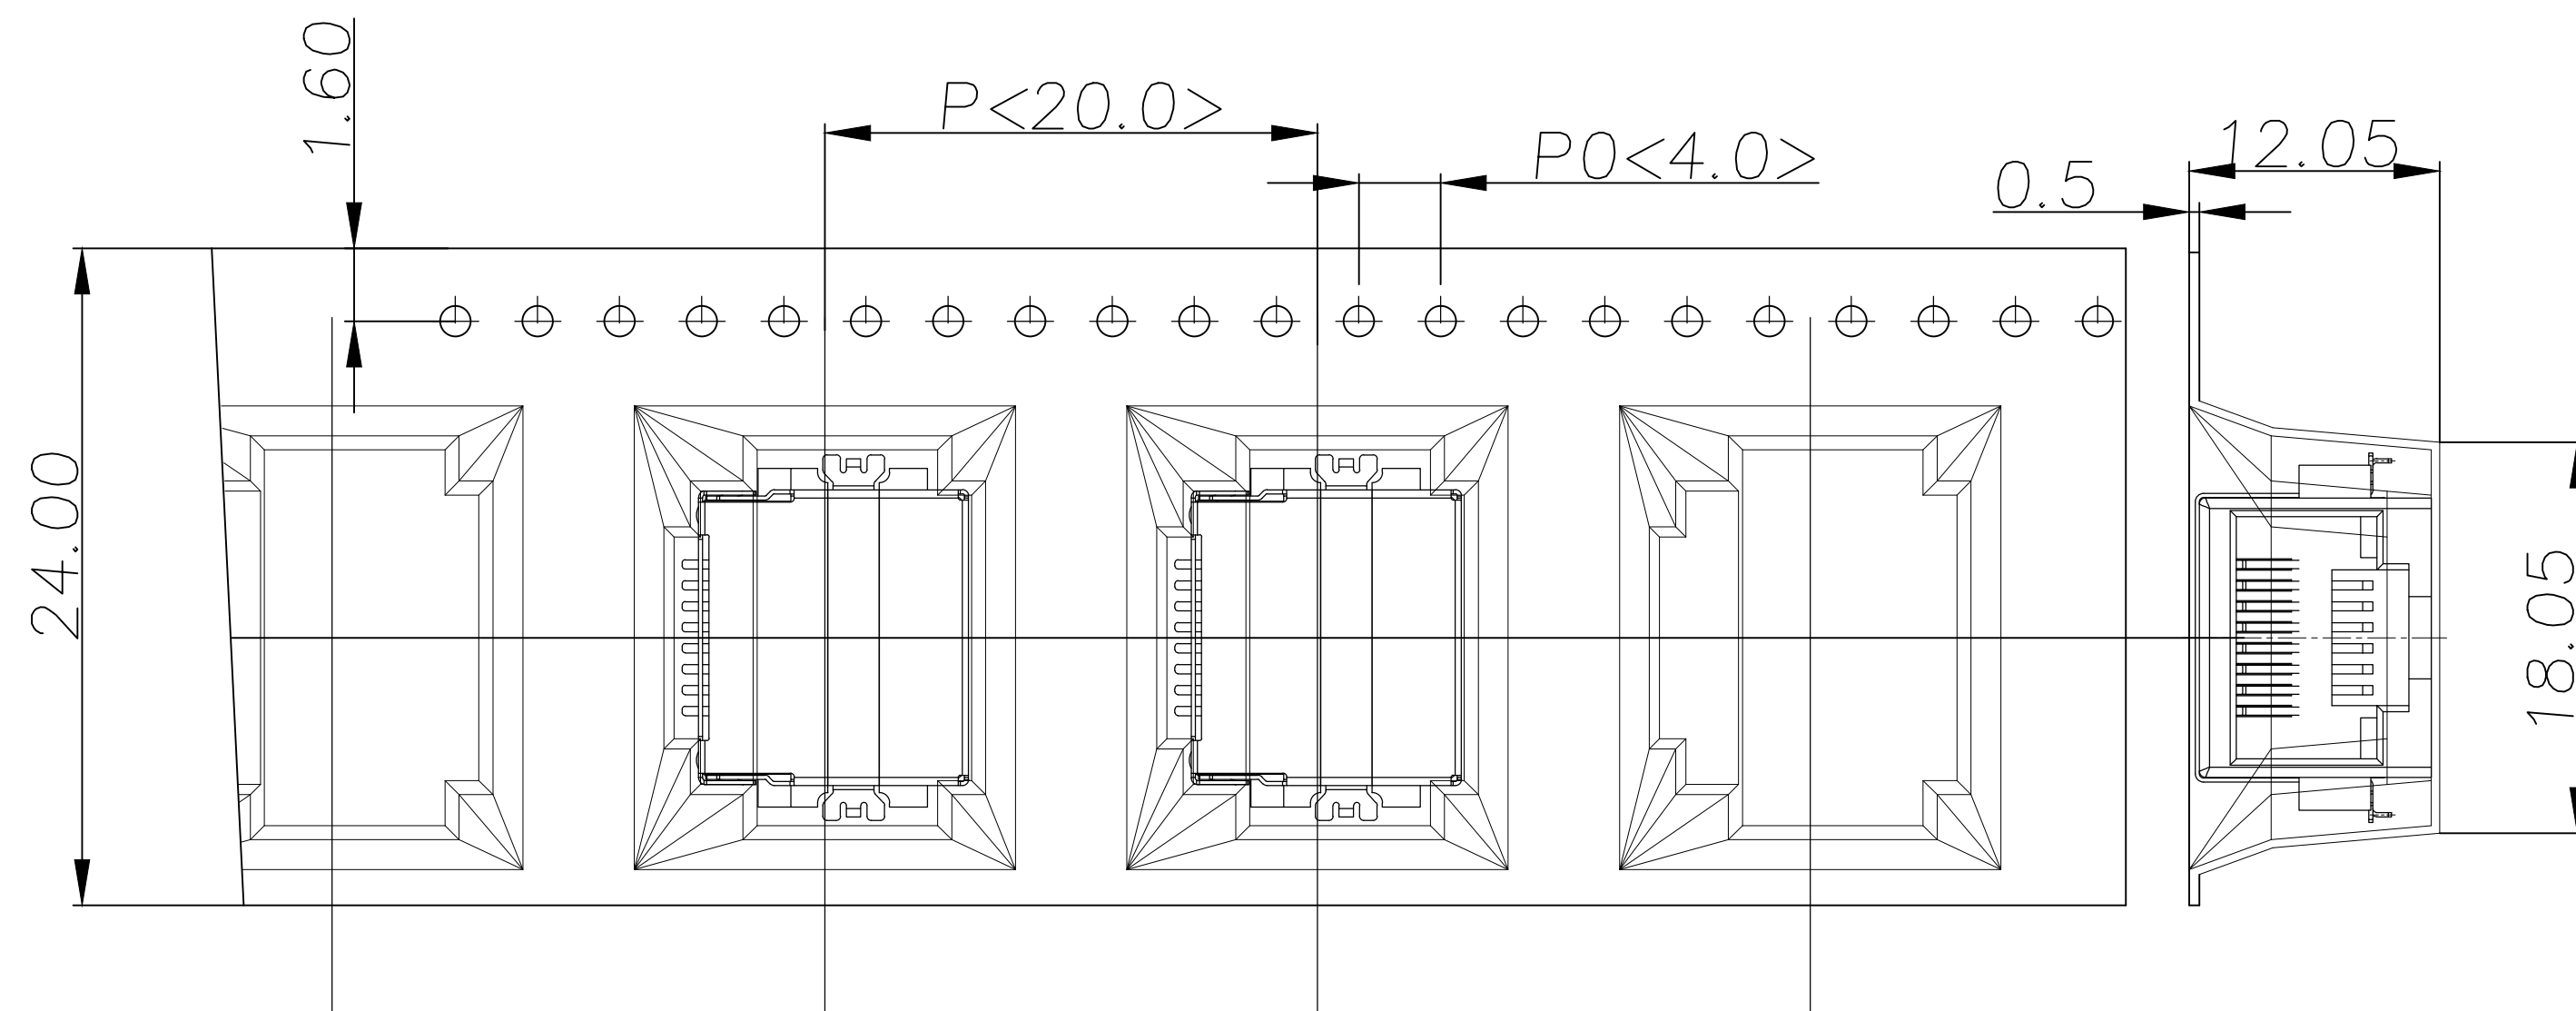

DESIGN	MISS ZENG	SC ALL			未注公差 T00LERANCE		品名： 网口连接器
DRAWIGN	MISS LI	ANIT	MM		X. ±0.35	X.XX ±0.25	
CHECK	Mr. ZENG	SIZE	A4: 210*297		X. X ±0.15	X. °±2.00°	
APPROVAL		VERSION	01				

型号：
RJ45沉板8.6全包 SMT



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co.,Ltd.