

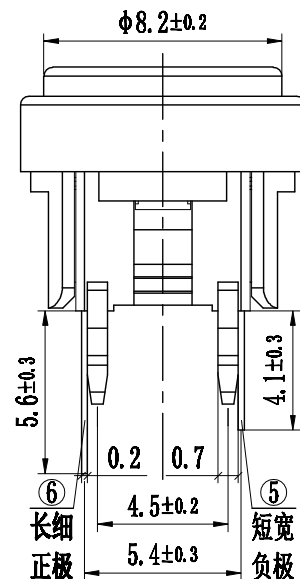
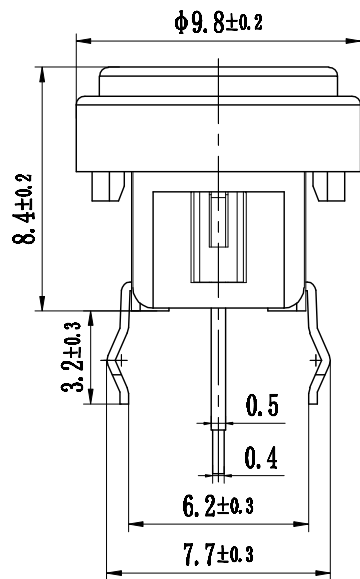
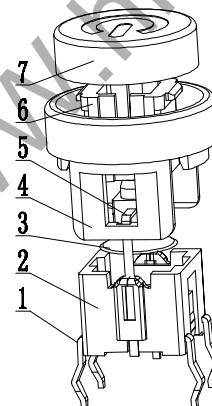
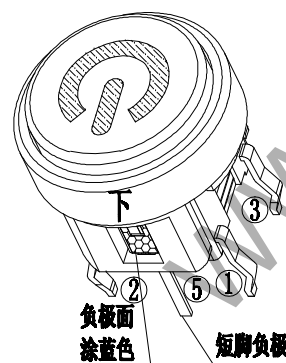


灯光选型表

灯光	灯光代码
白光	W White
红光	R Red
绿光	G Green
黄光	Y Yellow
蓝光	BL Blue
..	



带灯轻触主要技术指标: Llluminated Tact Switch Main Specifications:

气候等级 Climate Grade	额定值 Rated Values	接触电阻 Contact Resistance	耐电压 Dielectric Strength	绝缘电阻 Insulation Resistance	动作力 Operating Force	寿命 Life	盐雾试验 Salt mist Test
-25℃ 至 +75℃	30V DC, 30mA	$\leq 0.05 \Omega$	250V AC	$\geq 100M \Omega$	260gf $\pm$ 50gf	10W times	12 $\pm$ 1 hours.
-25℃ 至 +75℃	30V DC, 30mA	$\leq 0.05 \Omega$	250V AC	$\geq 100M \Omega$	160gf $\pm$ 50gf	10W times	12 $\pm$ 1 hours.

7	——	圆 帽	PC	1	银白	A0643-05 下底座
6	——	耳朵按钮	PA66	1	瓷白	A0643
5	——	LED 灯		1		借A0640蓝光
4	——	圆 框	PA66	1	黑色	A0643
3	——	弹 片	不锈钢	1	Ag	借A0630
2	——	塑 座	PA66	1	黑色	借A0640
1	——	卡 件	H62	1	Ag	借A0640
序号	零件料号	名 称	材 料	数量	镀层/颜色	备 注

注: 综合图-动作力和灯光按客户要求定制, 产品型号随之而变。

DESIGN	MISS ZENG	SC ALL			TOLERANCE	ANGLES
DRAWIGN	MISS LI	ANIT	mm		>20- ±0.15	
CHECK	Mr. ZENG	SIZE	A4 : 210*297		>10-20 ±0.10	
APPROVAL		VERSION	01		>5-10 ±0.05	
					-5 ±0.03	



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.