


REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A				

- NOTES:  
SPECIFICATION:
1. CURRENT RATING: 5.0A MAX
  2. VOLTAGE: 100 VAC
  3. TEMPERATURE RANGE: -30 °C ~ 85 °C
  4. CONTACT RESISTANCE: 40 MILLIONHM MAX
  5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
  6. LNSERTION FORCE : 5N~20N
  7. UNMATING FORCE: 8N~20N
  8. DURABILITY: 10,000 CYCLES

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B6	SBUS2
A6	DP1	B7	DN2
A7	DM1	B8	DP2
A8	SBUS1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
6	SHELL	STAINLESS STEEL	Ni Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	CONTACT	COPPER ALLOY	Au/Ni Plated 3+1U*	1SET
2	CONTACT	COPPER ALLOY	Au/Ni Plated 3+1U*	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS

DESIGN	MISS ZENG	SC ALL		未注公差	TOLERANCE	品名:	连接器
DRAWIGN	MISS LI	ANIT	MM	X: ±0.50	X*: ±2*	型号:	连接器
CHECK	Mr. ZENG	SIZE	A4: 210*297	X: ±0.30	X*: ±1*	CUSTOMER DRAWING	
APPROVAL		VERSION	01	XX: ±0.20	XX*: ±0.5*	东莞市航宏电子科技有限公司	
				XXX: ±0.10	XXX*: ±0.5*	Dongguan Hanghong Electronics Co., Ltd.	

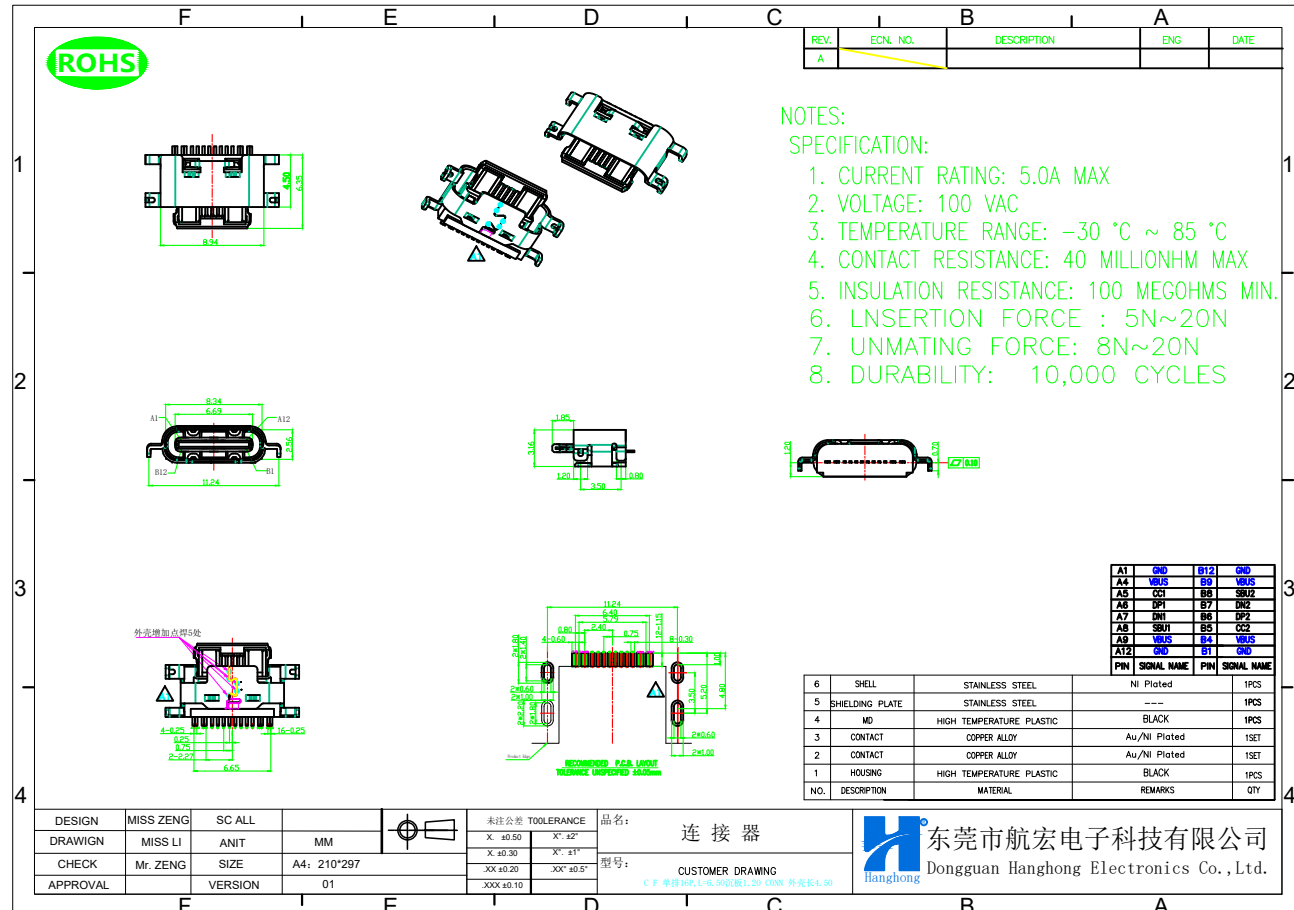

REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A				

- NOTES:  
SPECIFICATION:
1. CURRENT RATING: 5.0A MAX
  2. VOLTAGE: 100 VAC
  3. TEMPERATURE RANGE: -30 °C ~ 85 °C
  4. CONTACT RESISTANCE: 40 MILLIONHM MAX
  5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
  6. LNSERTION FORCE : 5N~20N
  7. UNMATING FORCE: 8N~20N
  8. DURABILITY: 10,000 CYCLES

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B6	SBUS2
A6	DP1	B7	DN2
A7	DM1	B8	DP2
A8	SBUS1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
6	SHELL	STAINLESS STEEL	Ni Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS

DESIGN	MISS ZENG	SC ALL		未注公差	TOLERANCE	品名:	连接器
DRAWIGN	MISS LI	ANIT	MM	X: ±0.50	X*: ±2*	型号:	连接器
CHECK	Mr. ZENG	SIZE	A4: 210*297	X: ±0.30	X*: ±1*	CUSTOMER DRAWING	
APPROVAL		VERSION	01	XX: ±0.20	XX*: ±0.5*	东莞市航宏电子科技有限公司	
				XXX: ±0.10	XXX*: ±0.5*	Dongguan Hanghong Electronics Co., Ltd.	

