
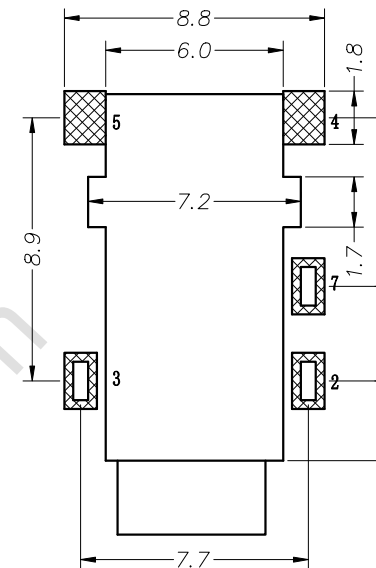
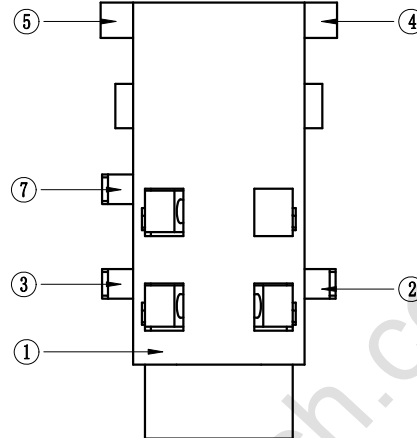
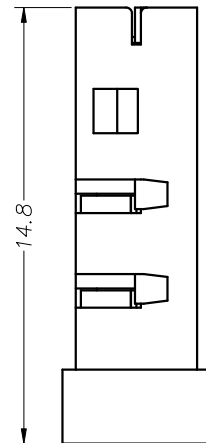
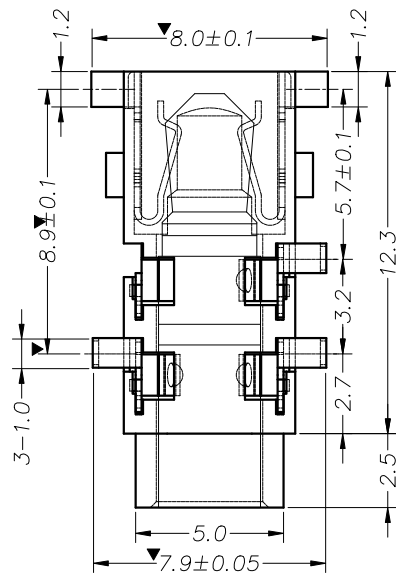
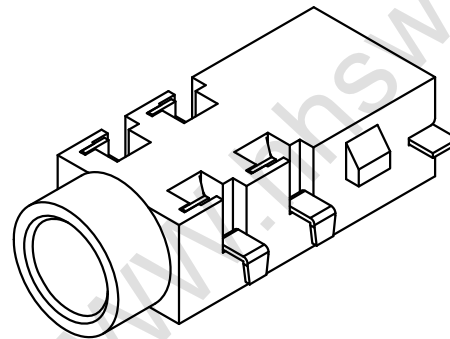



P.C.B LAYOUT TOP VIEW



PJ-337A

PJ-337A-01

PJ-337A-02

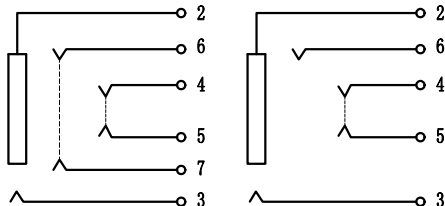

主要技术性能						
额定电负荷 DC 30V\0.5A						
5	PJ-337A-05	左后脚	1	磷 铜	0.2T	镀金
4	PJ-337A-04	右后脚	1	磷 铜	0.2T	镀金
3	PJ-337A-03	左中脚	2	磷 铜	0.2T	镀金
2	PJ-337A-02	右中脚	2	磷 铜	0.2T	镀金
1	PJ-337A-01	基座	1	LCP(黑色)		
序号	产品编号	产品名称	数量	材料	规格	电镀
使用温度范围 -30~70℃						
使用寿命 5000次						
接触电阻 ≤0.03Ω						
绝缘电阻 ≥100MΩ						
耐 压 AC500V(50Hz)/min						
插 拔 力 3-20N						

DESIGN	MISS ZENG	SC ALL	
DRAWIGN	MISS LI	ANIT	mm
CHECK	Mr. ZENG	SIZE	A4 : 210*297
APPROVAL		VERSION	01

TOLERANCE	ANGLES
X. ±0.20	X. ±5°
.X ±0.10	.X ±2°
.XX ±0.05	.XX ±1°
.XXX ±0.02	

品名：	耳机插座
型号：	PJ-337A有头-5P



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.