

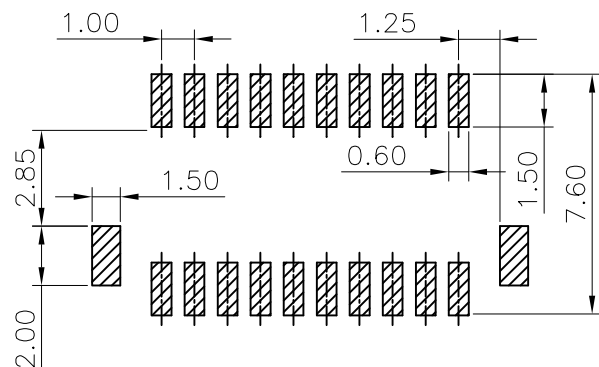
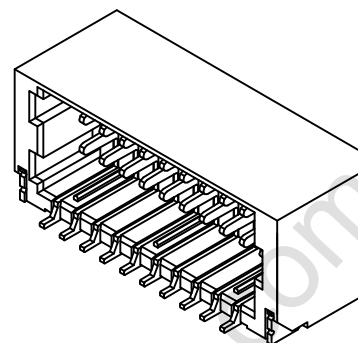


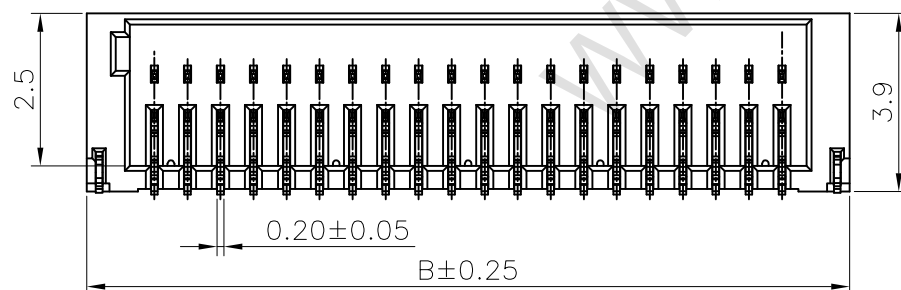

Recommended P.C.Board Layout

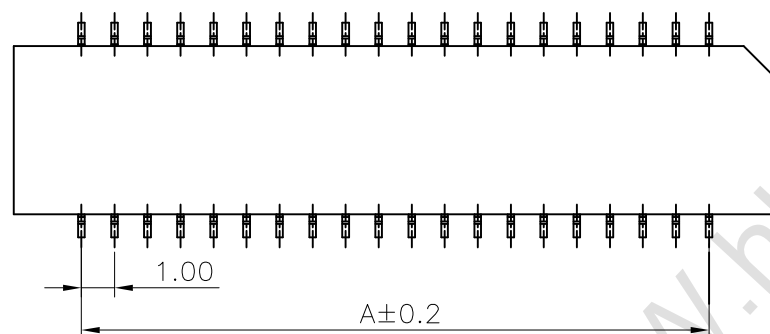

◆SPECIFICATIONS

- Current rating: 1A AC, DC
- Voltage rating: 50V AC,DC
- Temperature range: -25°C ~ +85°C
- Insulation resistance: 100MΩ Min.
- Withstanding voltage: 500V AC/ minute.
- Contact resistance: 20m Ω Max.

Material:

Insulator: Nylon 46 UL 94V-0



Contact: Phosphor Bronze

Solder Nail: Brass

Plating: Tin plated over Nickel

Circuits: See table

Suitable With: 1004 Series Dual Row Housing



PART NO.	Dimensions	
	A	B
10020614P4*0	5.00	8.60
10020814P4*0	7.00	10.60
10021014P4*0	9.00	12.60
10021514P4*0	14.00	17.60
10022014P4*0	19.00	22.60
10022514P4*0	24.00	27.60

DESIGN	MISS ZENG	SC ALL			TOLERANCE	ANGLES
DRAWIGN	MISS LI	ANIT	mm		X.X ±0.30	±1°
CHECK	Mr. ZENG	SIZE	A4 : 210*297		X.XX ±0.20	
APPROVAL		VERSION	01		X.XXX ±0.10	

品名：




线对板连接器

型号：

1.0间距-双排超薄-SMT



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.

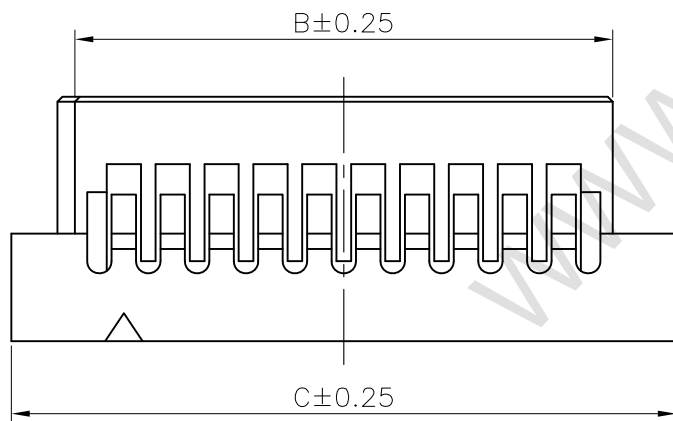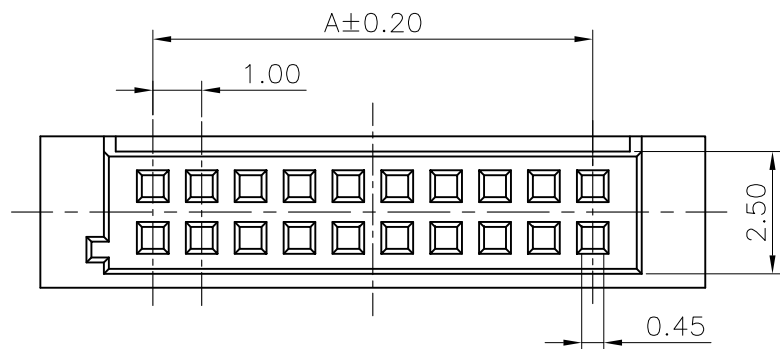

◆SPECIFICATIONS

- Current rating: 1A AC, DC
- Voltage rating: 50V AC,DC
- Temperature range: -25°C ~ +85°C
- Insulation resistance: 100MΩ Min.
- Withstanding voltage: 500V AC/ minute.
- Contact resistance: 20m Ω Max.

Material: Nylon 46 UL 94V-0
Suitable: 1004 series Terminal




PART NO.	Dimensions		
	A	B	C
1002102*P40	9.00	11.00	13.60
1002152*P40	14.00	16.00	18.60
1002202*P40	19.00	21.00	23.60
1002252*P40	24.00	26.00	28.60

DESIGN	MISS ZENG	SC ALL			TOLERANCE	ANGLES
DRAWIGN	MISS LI	ANIT	mm		X.X ±0.30	±1°
CHECK	Mr. ZENG	SIZE	A4 : 210*297		X.XX ±0.20	
APPROVAL		VERSION	01		X.XXX ±0.10	


品名： 线对板连接器
型号： 1.0间距-双排超薄-SMT



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.

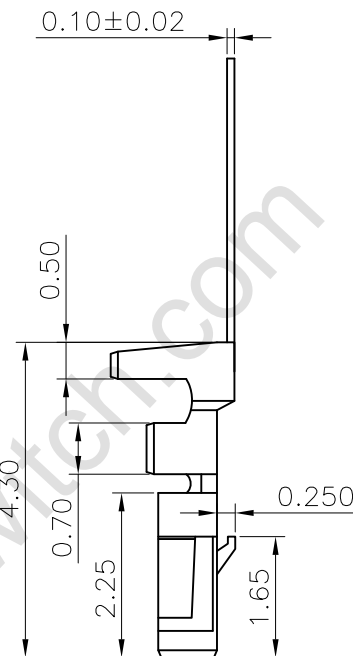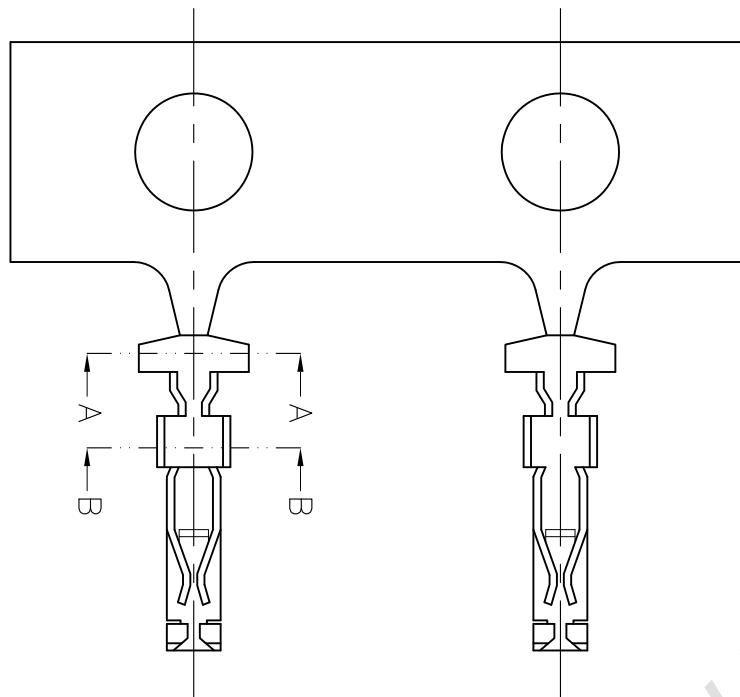

SECTION A-A



SECTION B-B

◆SPECIFICATIONS

- Current rating: 1A AC, DC
- Voltage rating: 50V AC,DC
- Temperature range: -25°C ~ +85°C
- Insulation resistance: 100MΩ Min.
- Withstanding voltage: 500V AC/ minute.
- Contact resistance: 20mΩ Max.

Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
100 *2AA100	AWG#28-#34	0.80mm(max)	Phosphor Bronze	Gold-Plated	15,000PCS

DESIGN	MISS ZENG	SC ALL		TOLERANCE	ANGLES
DRAWIGN	MISS LI	ANIT		X.X ±0.30	±1°
CHECK	Mr. ZENG	SIZE		X.XX ±0.20	
APPROVAL		VERSION		X.XXX ±0.10	

品名：线对板连接器
型号：1.0间距-双排超薄-SMT



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.